

# Autonomous and Adaptive Systems

## Autonomous Robots and Self-driving Cars

Mirco Musolesi

[mircomusolesi@acm.org](mailto:mircomusolesi@acm.org)


# Intelligent Robots

- ▶ A robot is a special type of agent: it is *physically situated* in the real world, while a software agent is situated in a virtual world like for example the World Wide Web, a simulation (think about videogames or confines of a software system).
- ▶ An *intelligent robot* is able to sense its environment and act on it in order to achieve its goal.

# Typical Subsystems of Robots

- ▶ The five major subsystems of robots are:
  - ▶ **Effectors:** subsystems for movement, such as wheels or legs and manipulation/grasping.
  - ▶ **Perception:** subsystems for sensing that provide a robot with the equivalent of the five senses: sight, hearing, smell, taste and touch.
  - ▶ **Control:** subsystems for controlling inner state of the robots, planning and execution of actions, etc.
  - ▶ **Communications:** subsystems for communication with the other agents and operators.
  - ▶ **Power:** subsystem for providing power to all the other subsystems.

# Unmanned Ground Systems

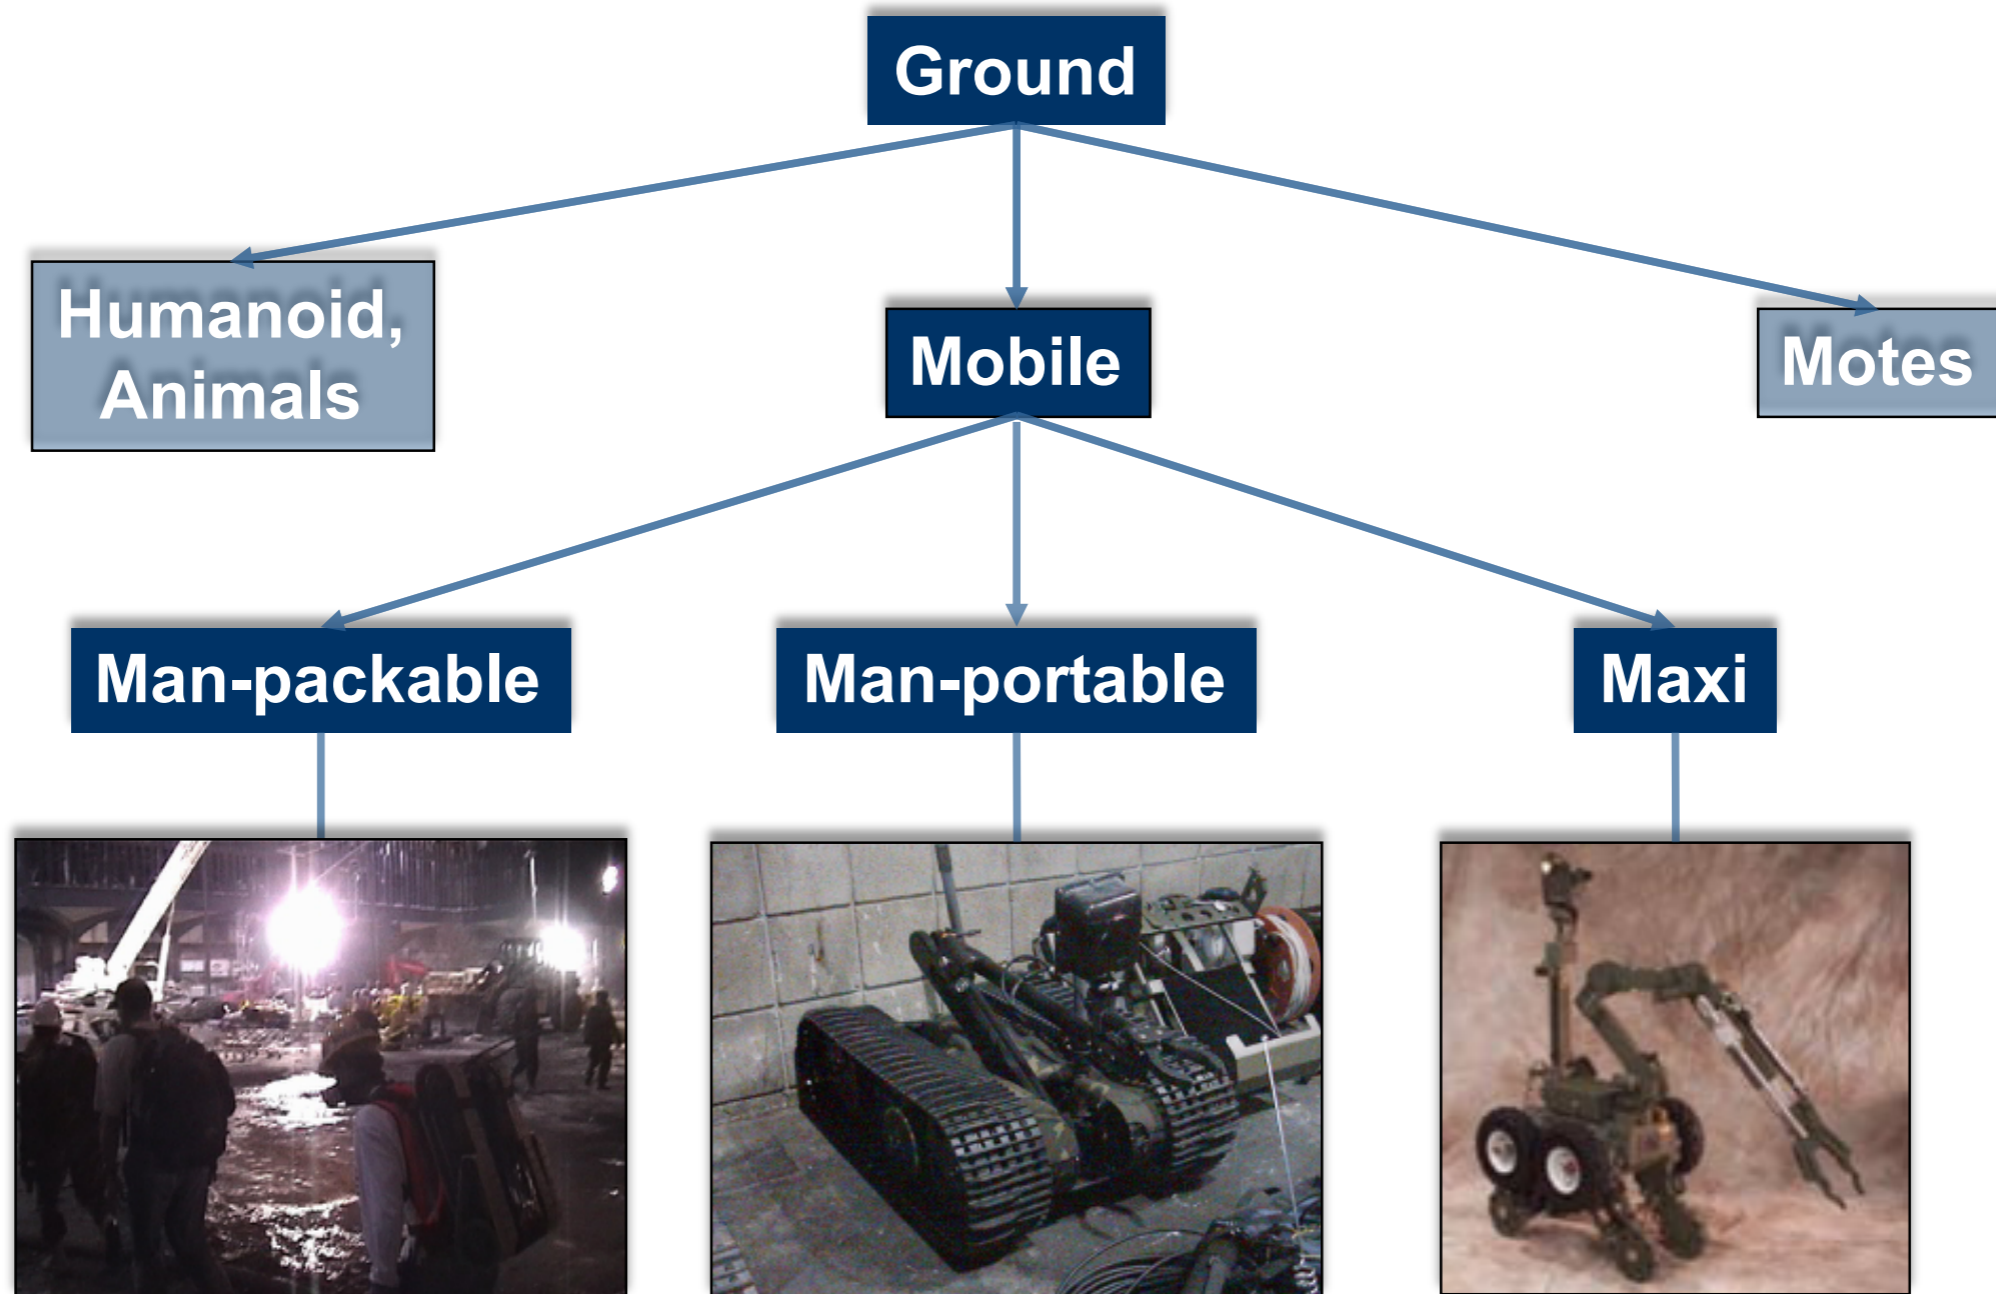


Source: Robin R. Murphy. Introduction to AI Robotics. MIT Press. 2019.

# Modalities of Unmanned Ground Systems

- ▶ **Humanoid:** anthropomorphic robots (Honda P3, Sony Asimo, Alderaban Nao, etc.).
- ▶ **Mobile robots:** non anthropomorphic robots (Roomba, NASA Rovers, etc.).
- ▶ **Motes:** miniature robots (unattended ground sensors).

# Unmanned Aerial Systems

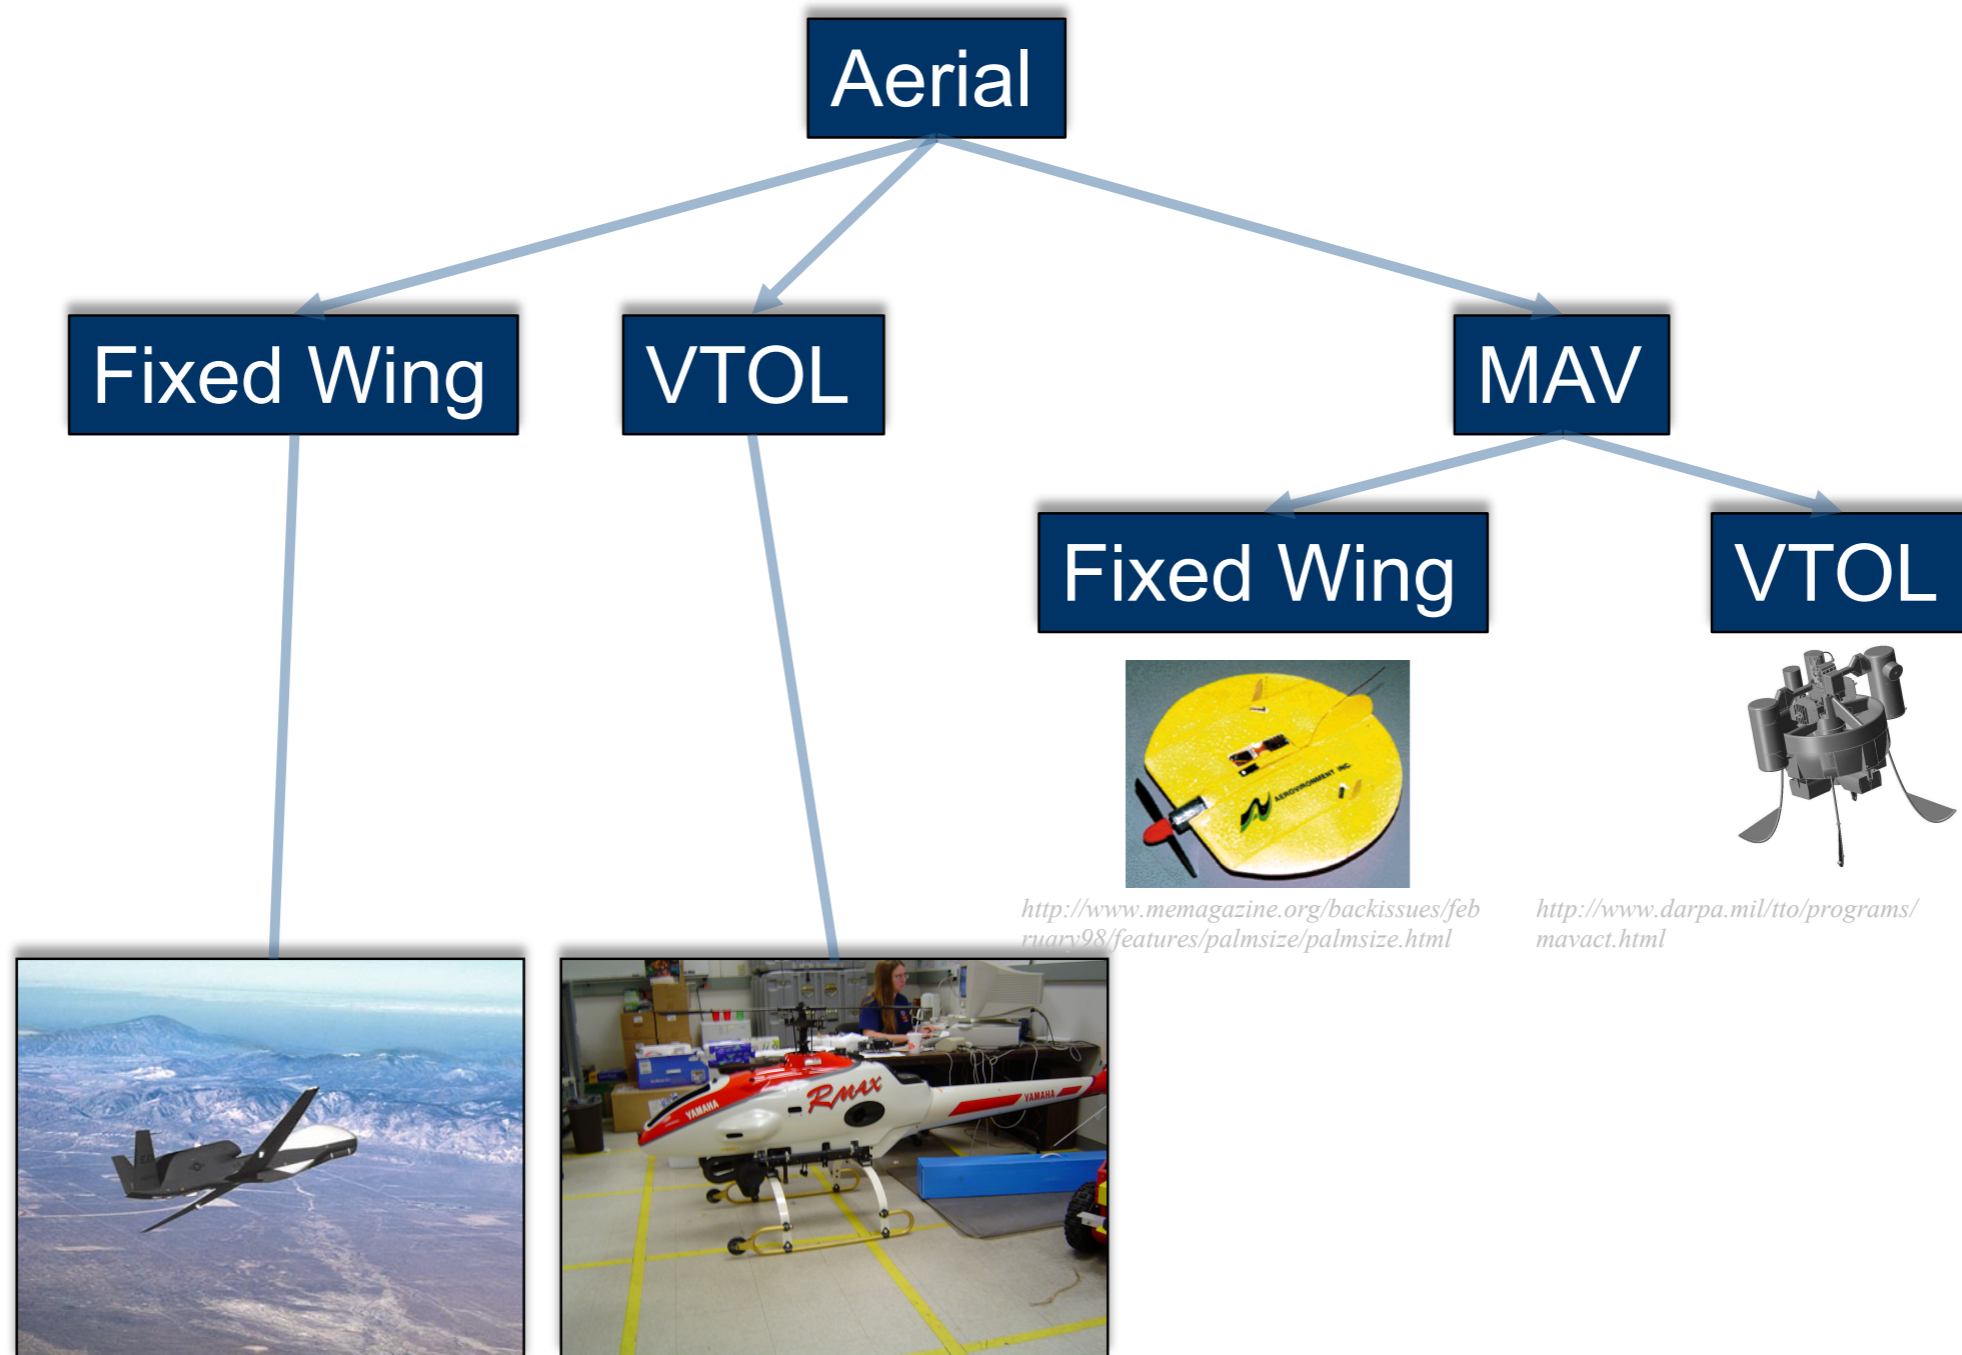


Source: Robin R. Murphy. Introduction to AI Robotics. MIT Press. 2019.

# Modalities of Unmanned Aerial Systems

- ▶ **Fixed wing-aircrafts:** aircrafts that look and like as planes (US Defense Predators and Global Hawks).
- ▶ **Rotor-crafts:** vertical take-off and landing (VTOL) platforms (Yamaha RMAX)
- ▶ **Micro UAVs (MAVs):** systems that less two meters in any characteristic dimension for example wing span, rotor blade length or fuselage. MAVs can be either fixed-wing or rotorcraft.

# Unmanned Marine Systems

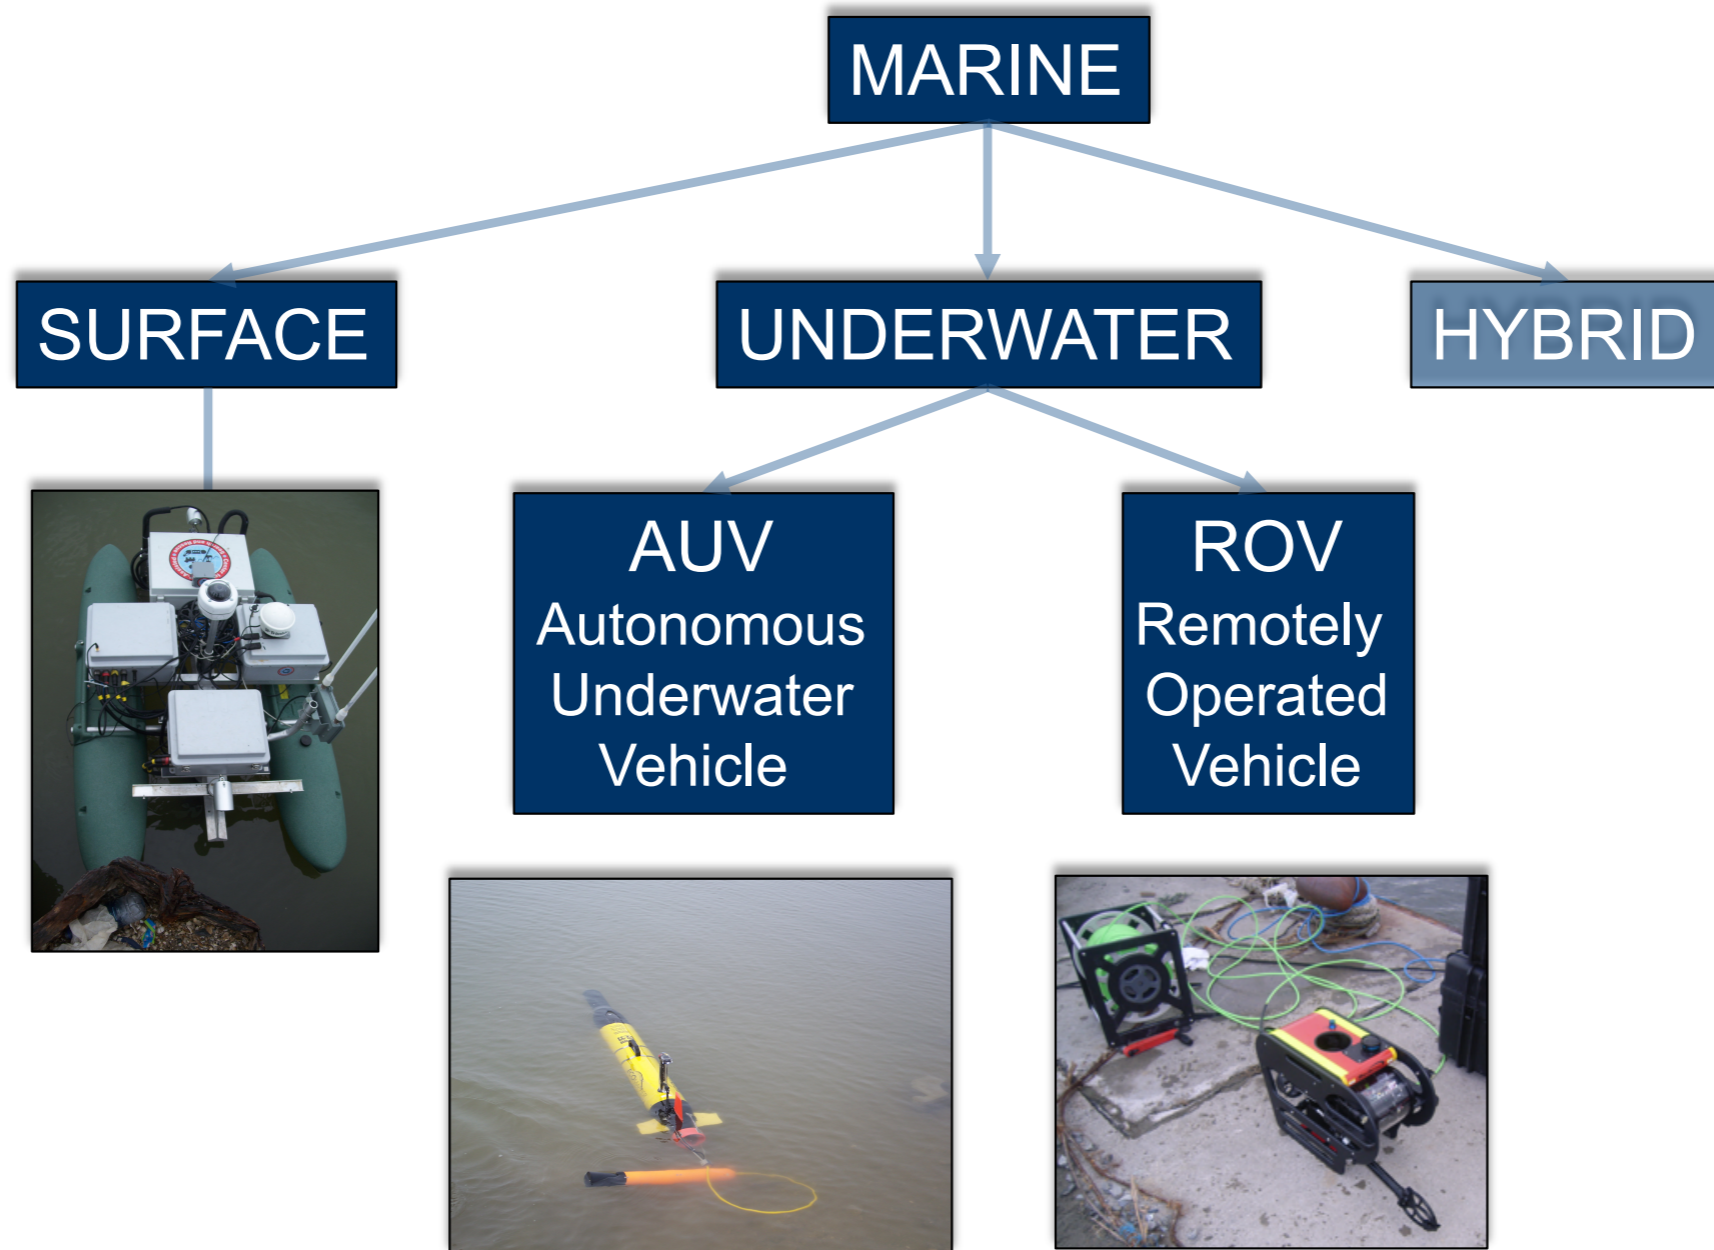

Source: Robin R. Murphy. Introduction to AI Robotics. MIT Press. 2019.



# Modalities of Unmanned Marine Systems

- ▶ **Surface systems:** systems/vehicles that move over the surface of water.
- ▶ **Unmanned underwater systems:** systems/vehicles that submerge
  - ▶ *Autonomous underwater vehicles (AUV):* systems/vehicles that are not tethered and are not in constant communication with an operator.
  - ▶ *Remotely operated vehicle (ROV):* systems/vehicles that are tethered and can be controlled in real time.
- ▶ **Hybrid systems:** systems/vehicles that are able to move and submerge.


# Key Questions

- ▶ What is the difference between automation and autonomy?
- ▶ Why does it matter that there is a difference between autonomy and automation?

# Examples



**Automation**

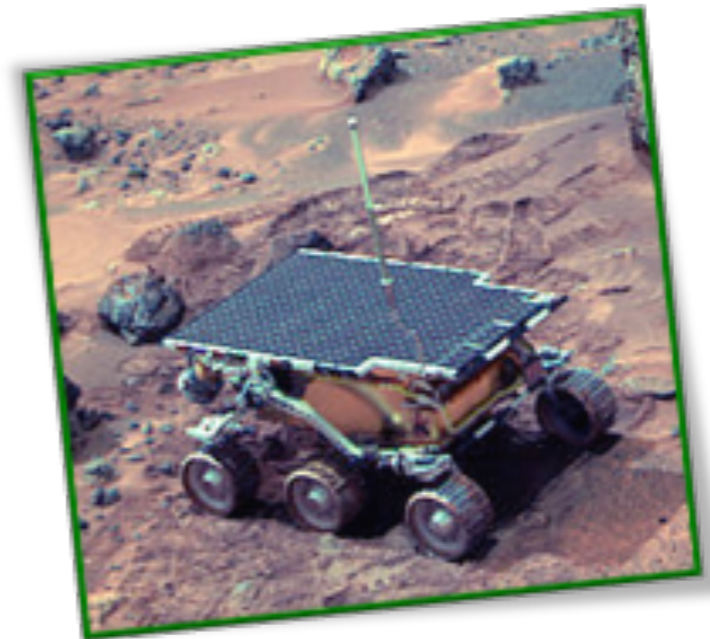

**Autonomy**

Source: Robin R. Murphy. Introduction to AI Robotics. MIT Press. 2019.

# What is the Difference between Automation and Autonomy?

- ▶ One possible answer is that automation is about robots as tools and autonomy is about robots as agents.
- ▶ However, the difference is very blurred in practice. One possible way is to discuss the differences (in a continuum) in terms of four characteristics:
  - ▶ Does the system focus on execution of plans versus generation of plans?
  - ▶ Does the system use a close or an open-world model?
  - ▶ Does the system use deterministic or non-deterministic algorithms?
  - ▶ Does the system manipulate signals or symbols/concepts?

# Choice between Automation and Autonomy

- ▶ This is a key design choice: elements of autonomy will lead to different types of failure modes, different types of programming, etc.
- ▶ Thinking about vulnerabilities and implications is fundamental.
- ▶ Autonomy also raises very important ethics questions about responsibility, liability, agency, etc.
- ▶ Most of the systems in reality will be a blend of both.

# Choice between Automation and Autonomy

- ▶ We essentially lack design rules: it is very difficult to say in general when autonomy is better than automation.
- ▶ Autonomy is problematic in terms of testing (non-deterministic behaviour).
- ▶ Automation lacks adaptivity:
  - ▶ Think about a welding robot: if something is out of place, the robot will not adapt easily.
  - ▶ Adaptation and the possibility of planning ahead also in presence of unexpected situations is one of the most important characteristics of autonomous systems.

# Models: Open vs Close World Models

- ▶ In order for a machine to understand the world, there has to be a computationally relevant representation called a world model.
- ▶ If the robots has only navigational capabilities, the world may consist of a map with objects.
- ▶ A representation of the world is not necessarily spatial.
  - ▶ If the robot interacts with other agents, it may need to represent what it thinks about the other agents (in terms of beliefs, intentions, etc.).
- ▶ The world can be a collection of world models.
- ▶ A world-model maybe pre-programmed into a robot, may be learned by a robot (or a combination of both).
- ▶ Examples of pre-programmed information are: rules, constraints, maps, etc.

# Closed-World and Open-World Assumptions


- ▶ World models are classified as being *closed-world* or *open-world*.
- ▶ The close-world logic assumption says that everything possible is known.
  - ▶ In formal logic, this means that any object, condition or event that is not the database is false.
  - ▶ Closed-world assumption in *Jurassic Park*.
- ▶ The algorithm for a robot operating under the open-world assumption assume that the list of possible states, objects or conditions cannot be completely specified.
  - ▶ See applications of machine learning for adding knowledge or function approximation in reinforcement learning for states that might not be present in a q-table.



# The Frame Problem


- ▶ Related to the closed-world assumption is the frame problem, which refers to the problem of correctly identifying what is unchanging in the world and, thus, does not require constant updating, thereby reducing computation.
- ▶ Typically, control-theoretic approaches to robotics are based on closed-world models, whereas AI-based ones on open-world models.

# Example: Industrial Robot

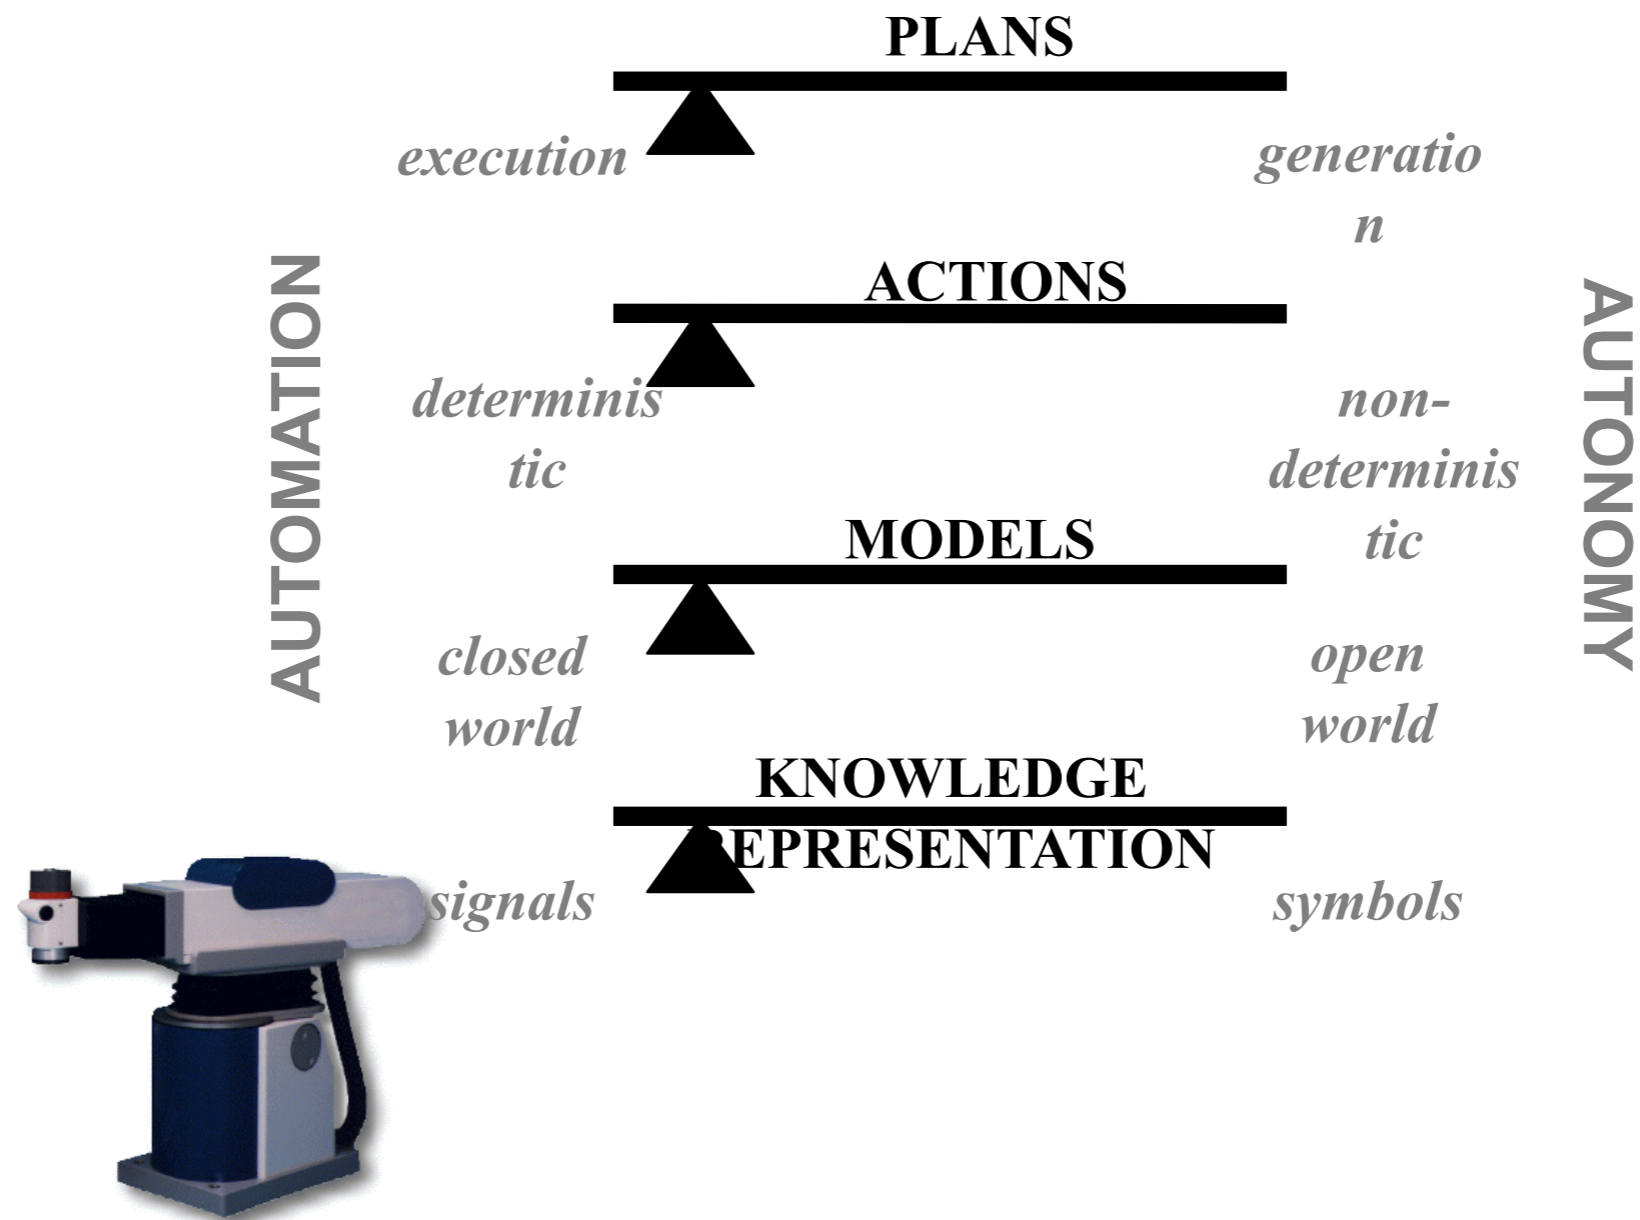


Source: Robin R. Murphy. Introduction to AI Robotics. MIT Press. 2019.

# Example: Mars Rover

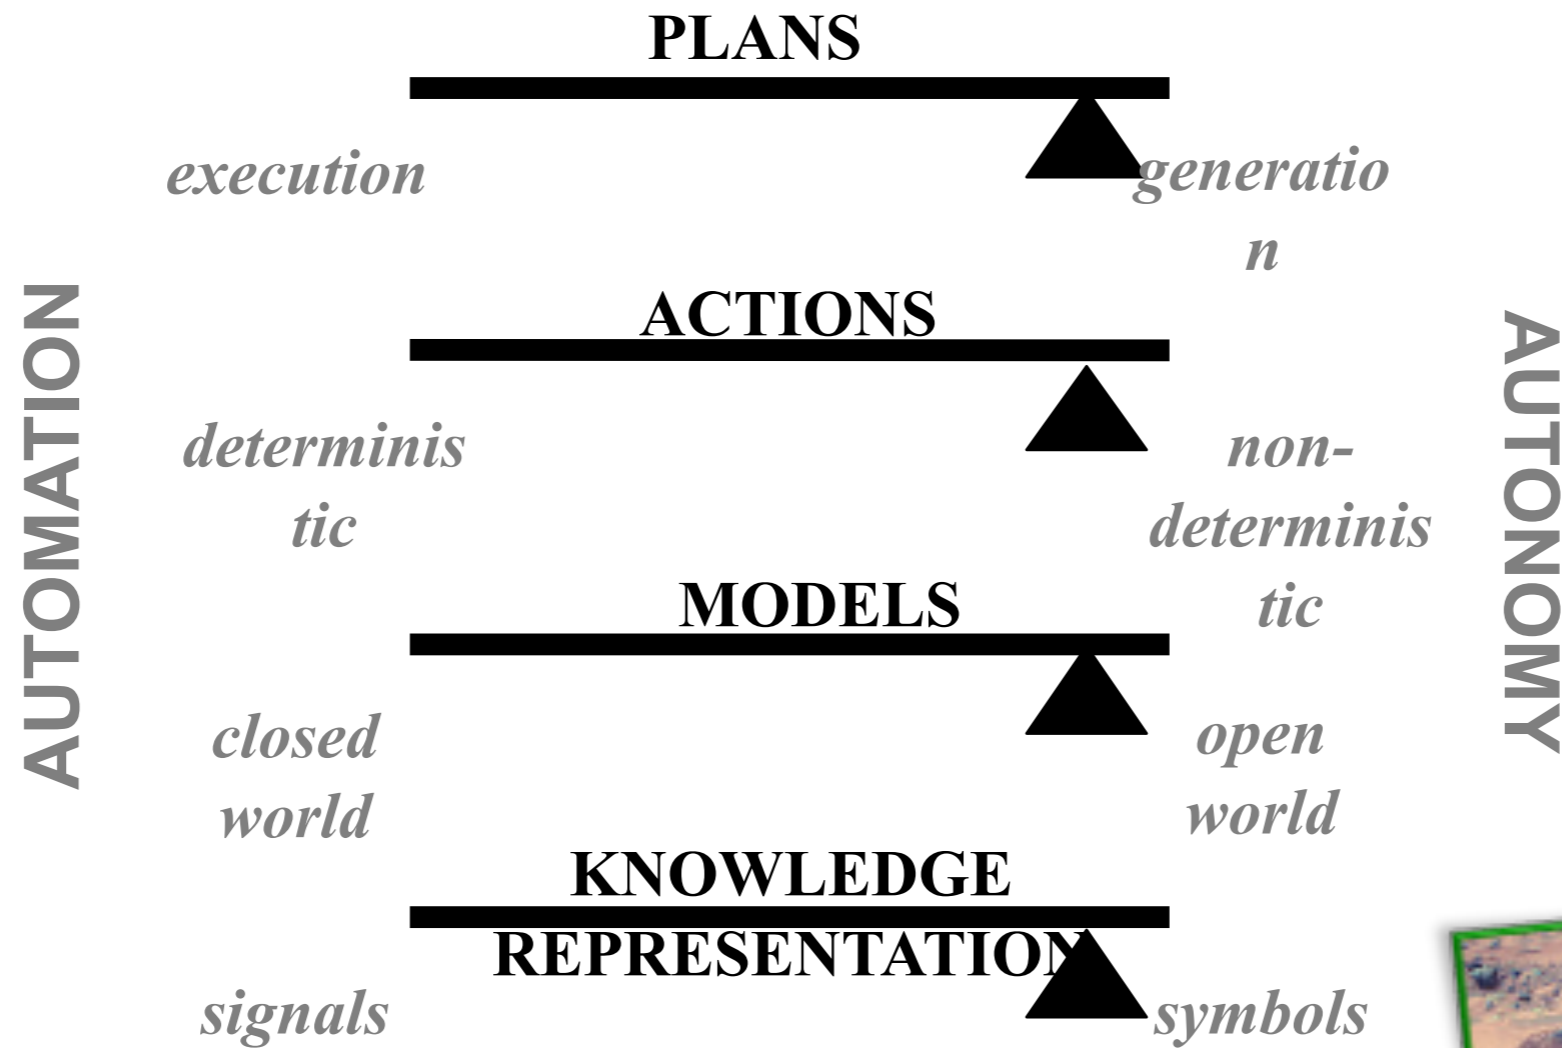

Source: Robin R. Murphy. Introduction to AI Robotics. MIT Press. 2019.

# Example: Roomba

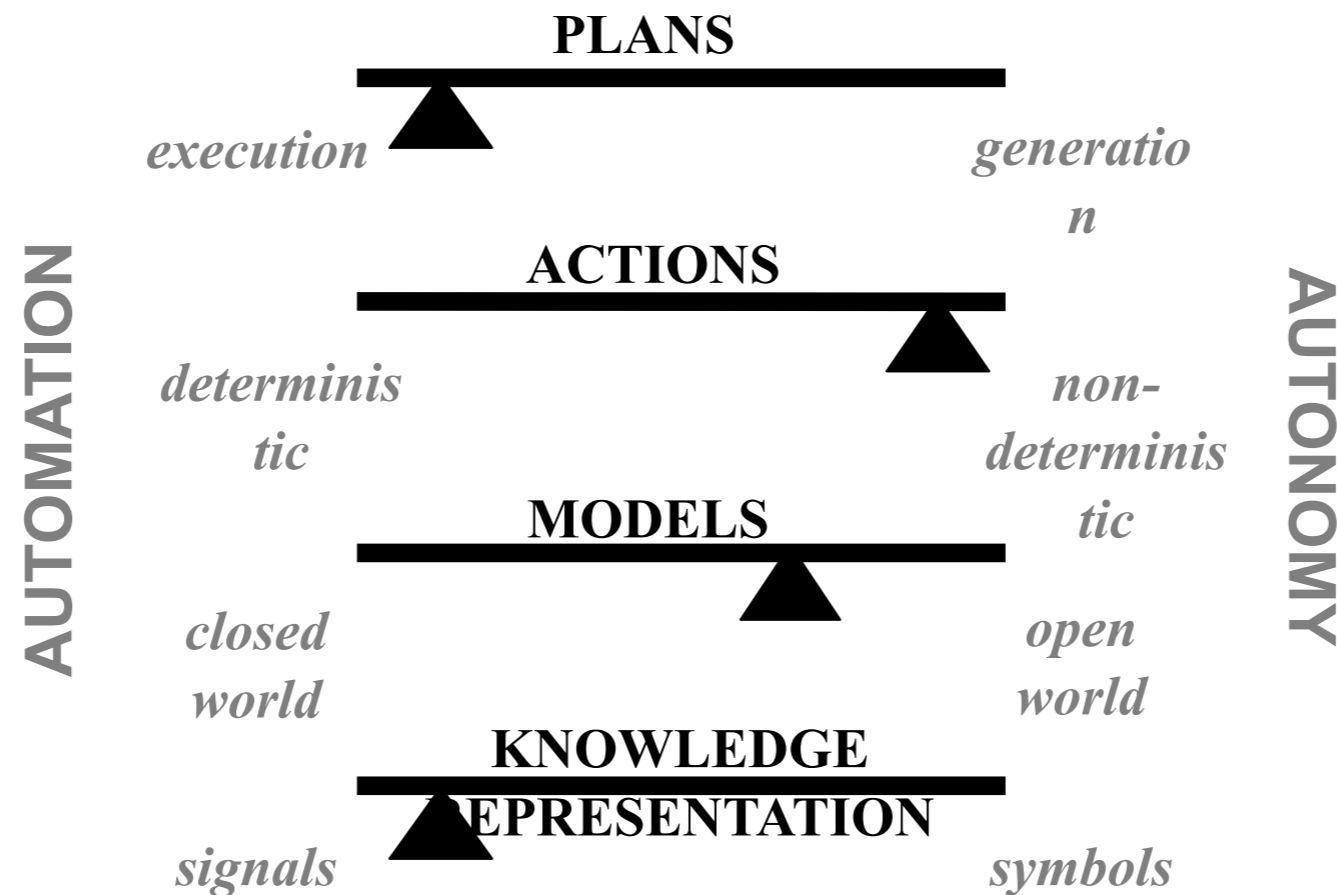

Source: Robin R. Murphy. Introduction to AI Robotics. MIT Press. 2019.

# Bounded Rationality

- ▶ The concept of *bounded rationality* was introduced by Herbert Simon, one of the AI pioneers:
  - ▶ Decision making capability of all agents, human or artificial, is limited by how much information they have, their computational abilities and the amount of time they have available to make a decision.
- ▶ While a robot may dynamically adapt or replan to overcome the occurrence of unexpected events, it cannot go beyond to what it was programmed for (including machine learning algorithms).

**Herbert A. Simon**



**The Sciences of the Artificial**

*Third Edition*

# Self-driving Cars

- ▶ Self-driving cars are very special case of unmanned vehicles.
  - ▶ with a human (or humans) on them.
- ▶ One of the most interesting applications of autonomous systems technology.
- ▶ Big economic impact:
  - ▶ Urban planning (think about planning).
  - ▶ New applications also given the fact people will have more time during trips.



Source: America's Electric Light and Power Companies (circa 1950s).





 **LiveSlides** web content

To view

**Download the add-in.**

[liveslides.com/download](https://liveslides.com/download)

**Start the presentation.**

## Autonomous Driving

Google's modified Toyota Prius uses an array of sensors to navigate public roads without a human driver. Other components, not shown, include a GPS receiver and an inertial motion sensor.

### LIDAR

A rotating sensor on the roof scans more than 200 feet in all directions to generate a precise three-dimensional map of the car's surroundings.

### POSITION ESTIMATOR

A sensor mounted on the left rear wheel measures small movements made by the car and helps to accurately locate its position on the map.

### VIDEO CAMERA

A camera mounted near the rear-view mirror detects traffic lights and helps the car's onboard computers recognize moving obstacles like pedestrians and bicyclists.



### RADAR

Four standard automotive radar sensors, three in front and one in the rear, help determine the positions of distant objects.

# UBER ATG


Top mounted lidar units provide a 360° 3-dimensional scan of the environment

Side and rear facing cameras work in collaboration to construct a continuous view of the vehicle's surroundings

Forward facing camera array focus both close and far field, watching for braking vehicles, crossing pedestrians, traffic lights, and signage

Roof mounted antennae provide GPS positioning and wireless data capabilities

360°  
radar  
coverage

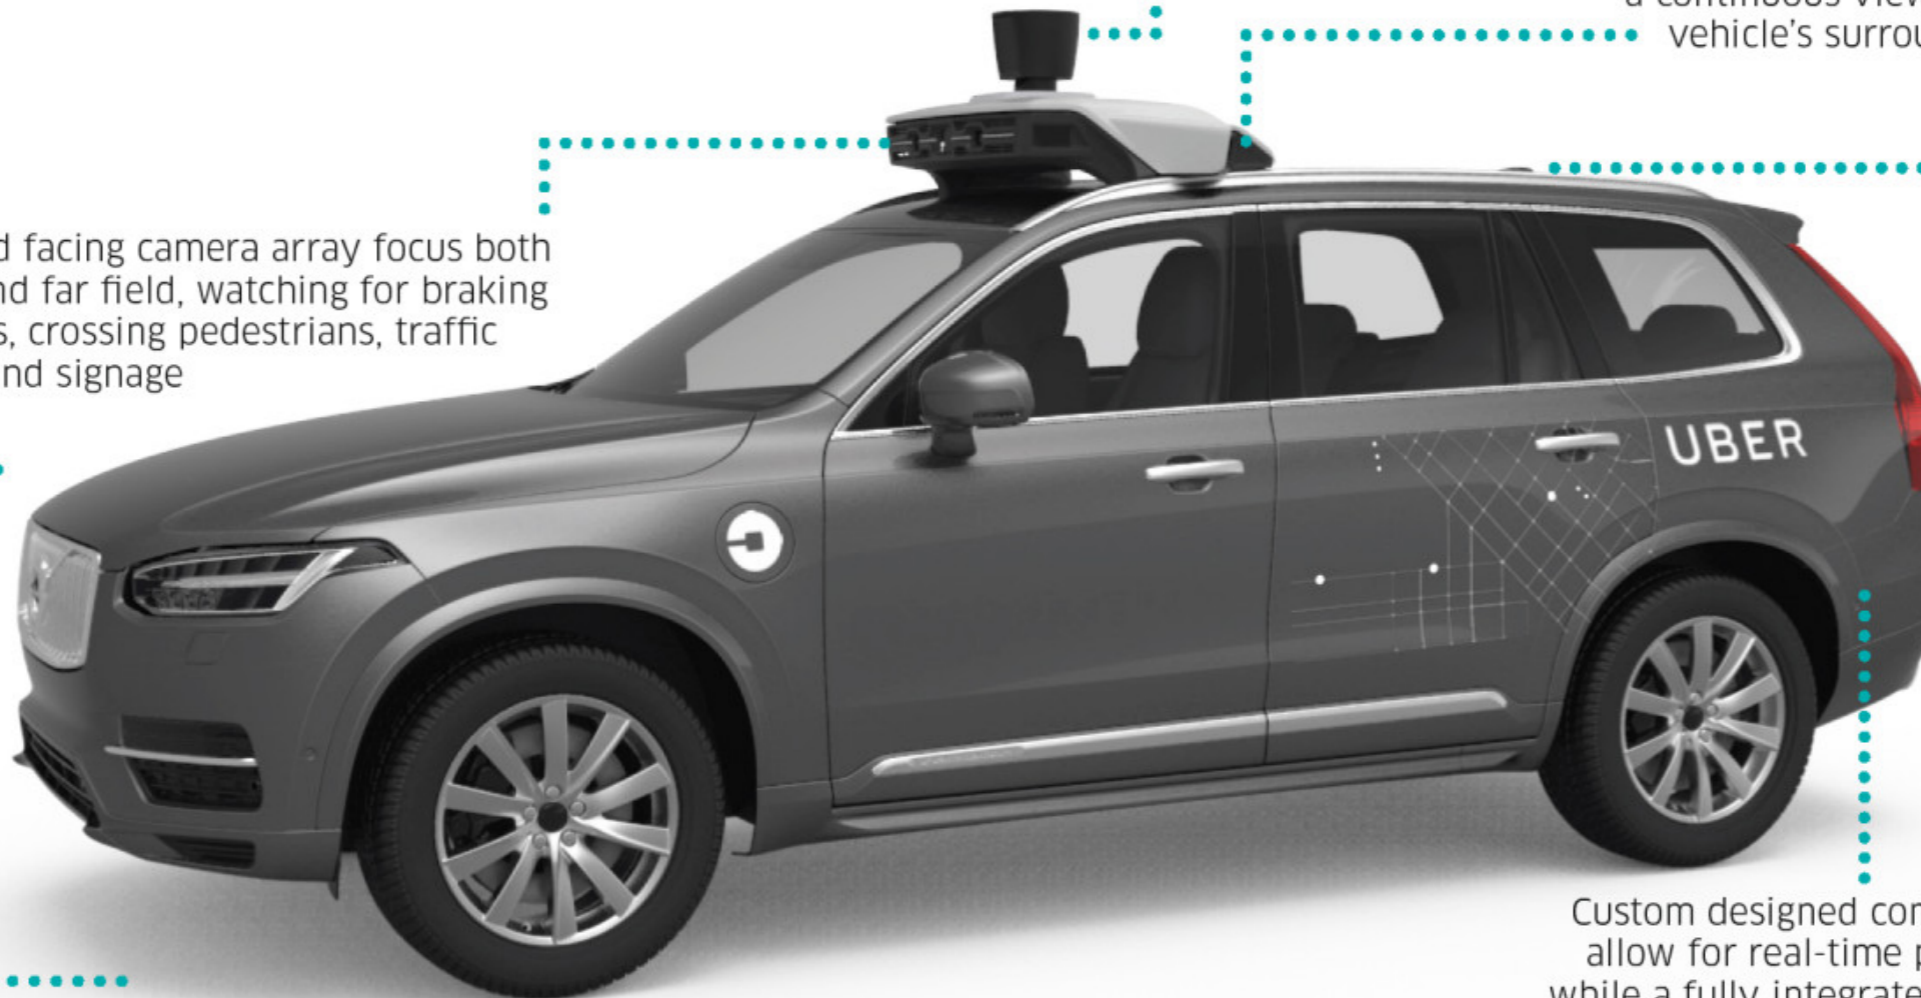

Custom designed compute and storage allow for real-time processing of data while a fully integrated cooling solution keeps components running optimally

## Self Driving Uber sensor suite

7 Cameras  
1 Laser  
Inertial Measurement Units

Custom compute and data storage  
360° radar coverage

Advanced  
Technologies  
Group

UBER

## Under the bonnet

How a self-driving car works

Signals from **GPS (global positioning system)** satellites are combined with readings from tachometers, altimeters and gyroscopes to provide more accurate positioning than is possible with GPS alone

**Lidar (light detection and ranging)** sensors bounce pulses of light off the surroundings. These are analysed to identify lane markings and the edges of roads

**Video cameras** detect traffic lights, read road signs, keep track of the position of other vehicles and look out for pedestrians and obstacles on the road


**Radar sensor**

**Ultrasonic sensors** may be used to measure the position of objects very close to the vehicle, such as curbs and other vehicles when parking

The information from all of the sensors is analysed by a **central computer** that manipulates the steering, accelerator and brakes. Its software must understand the rules of the road, both formal and informal

**Radar sensors** monitor the position of other vehicles nearby. Such sensors are already used in adaptive cruise-control systems

Source: *The Economist*

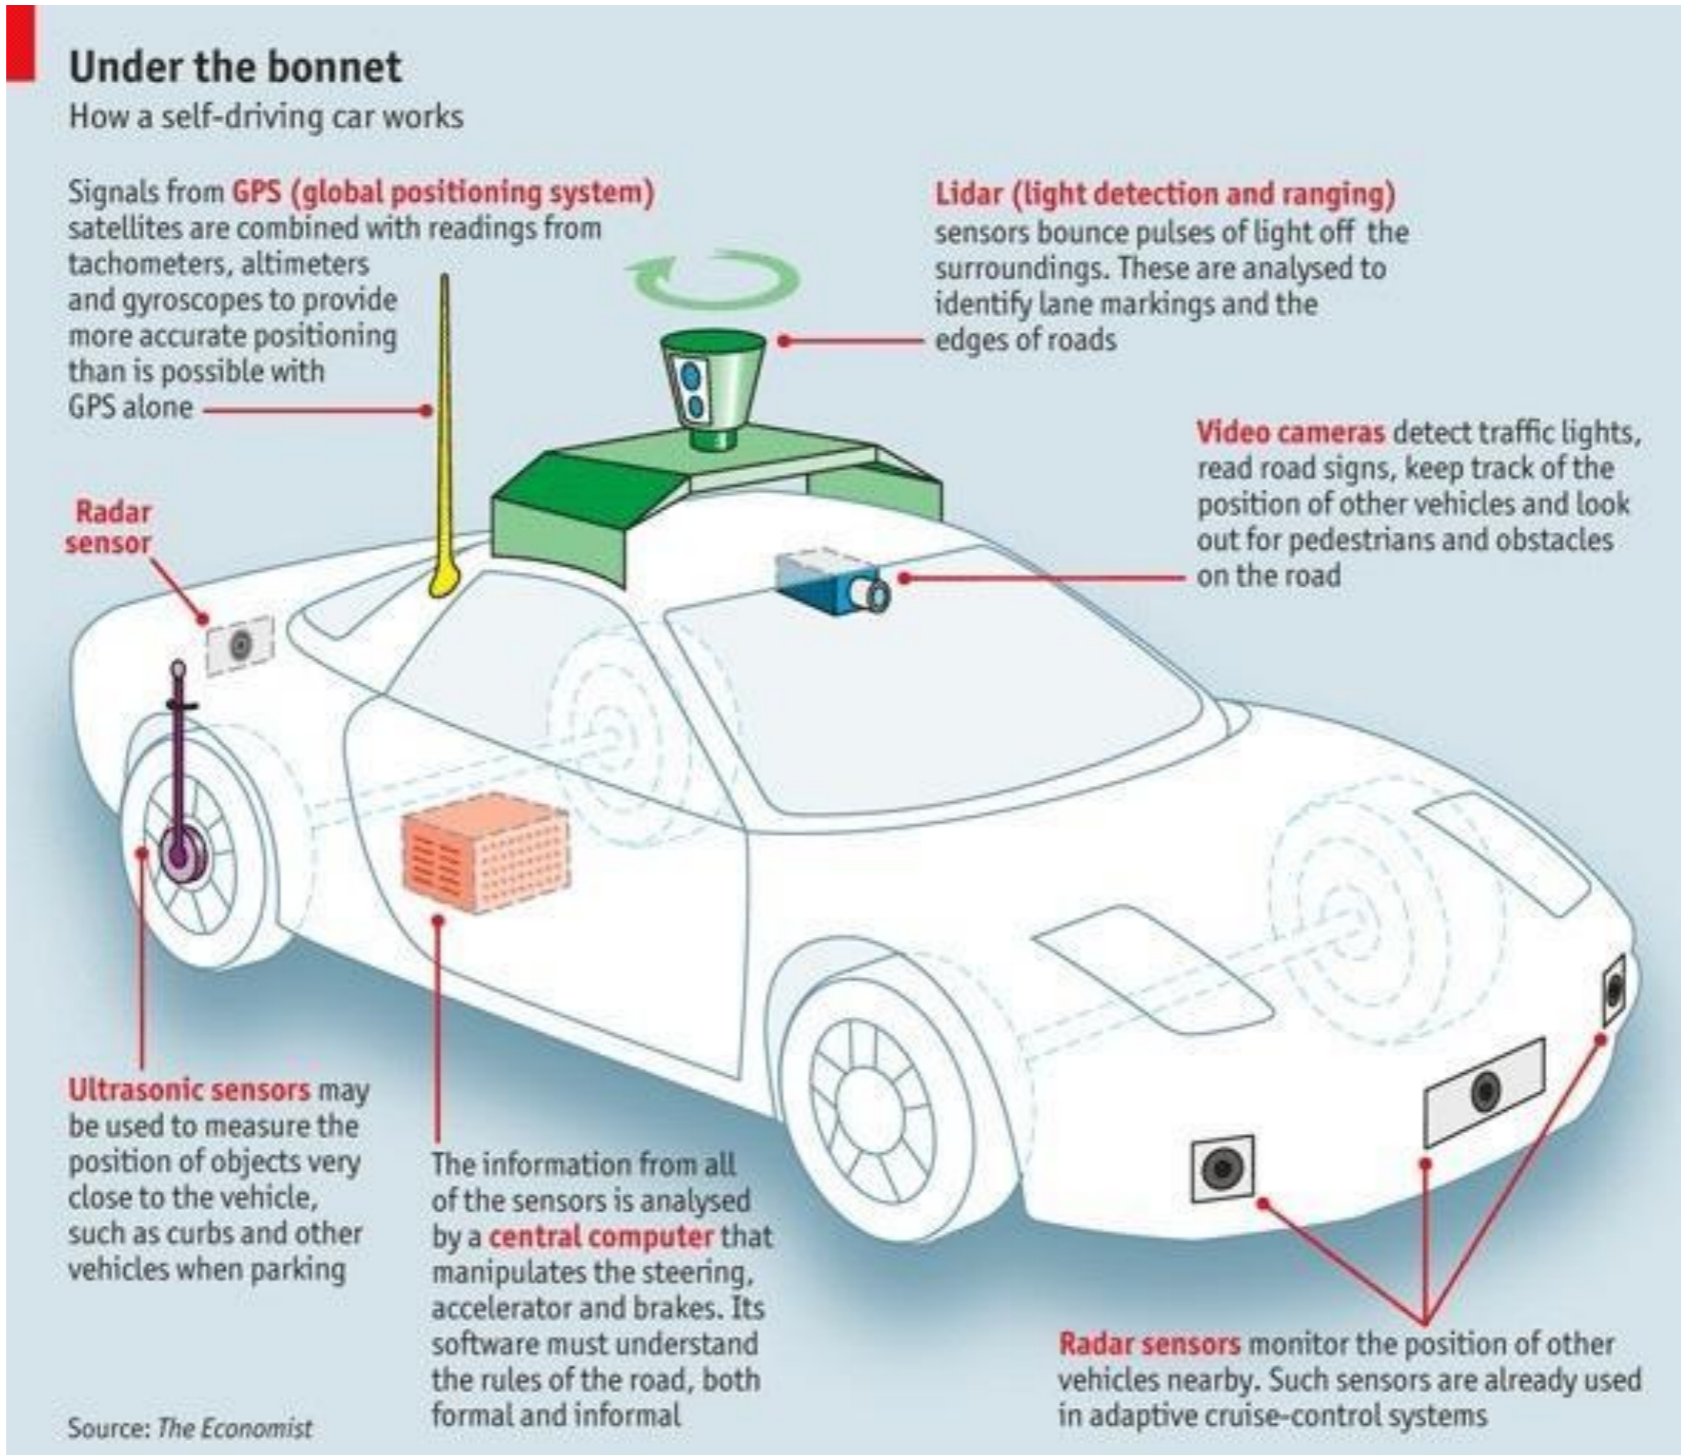

# Self-driving Cars

- ▶ Self-driving cars are complex engineering systems that rely on several technologies that have been developed in the last decades or even before like in the case of radars.
- ▶ Key problem is real-time perception and processing of information from the environment.
  - ▶ Real-time understanding and decision making is fundamental.
  - ▶ Multiple data streams are merged together to get a picture of the environment and to take decisions.

# High-Definition Digital Maps

- ▶ A car uses GPS in order to identify its position on a high definition map.
- ▶ It is common for a car's operating system to calculate its current location by relying on visual cues in the flow of real-time sensor data that describe the nearby environments.
- ▶ High-definition maps are not only about 2D data, but also presence of objects, etc.
- ▶ Maps are updated in real-time using lidar technologies.

# Digital Cameras

- ▶ Self-driving cars have specialised digital cameras that also analyse the image in real-time.
- ▶ In this way the camera can eliminate irrelevant information.
- ▶ The data stream might also contain information about the list of objects contained in the video stream (through application of computer vision techniques and deep learning for example).
- ▶ Different cameras are used for a 3D reconstruction of the scene.
  - ▶ Having 8+ cameras is common.
- ▶ Issues with cameras: faults, dirt, etc.



Credit: Nvidia.




# Lidar


- ▶ Lidar is used for measuring distances by illuminating the target with beams of laser light and measuring the reflection using a sensor.
- ▶ This provides a 3D representation of the environment.
- ▶ Lidar data are combined with GPS data and information from IMUs (accelerometers and gyroscopes).
- ▶ The data generated by lidar is fed to software that arranges the information in a digital model called a point cloud.
- ▶ Highly effective for slow moving situation (for example cross-roads), but not for emergency driving situation.

# Lidar

- ▶ Since they cannot use for taking instantaneous decisions, lidar is used together with cameras.
- ▶ Cameras are improving every year and some of the self-driving cars.
  - ▶ Declaration of Tesla CEO Elon Musk in 2015: “I don’t think you need lidar. I think you can do this all with passive optical and then with maybe one forward RADAR. I think that completely solves it without the use of lidar. I am not a big fan of lidar. I think it does not make sense in this context”.

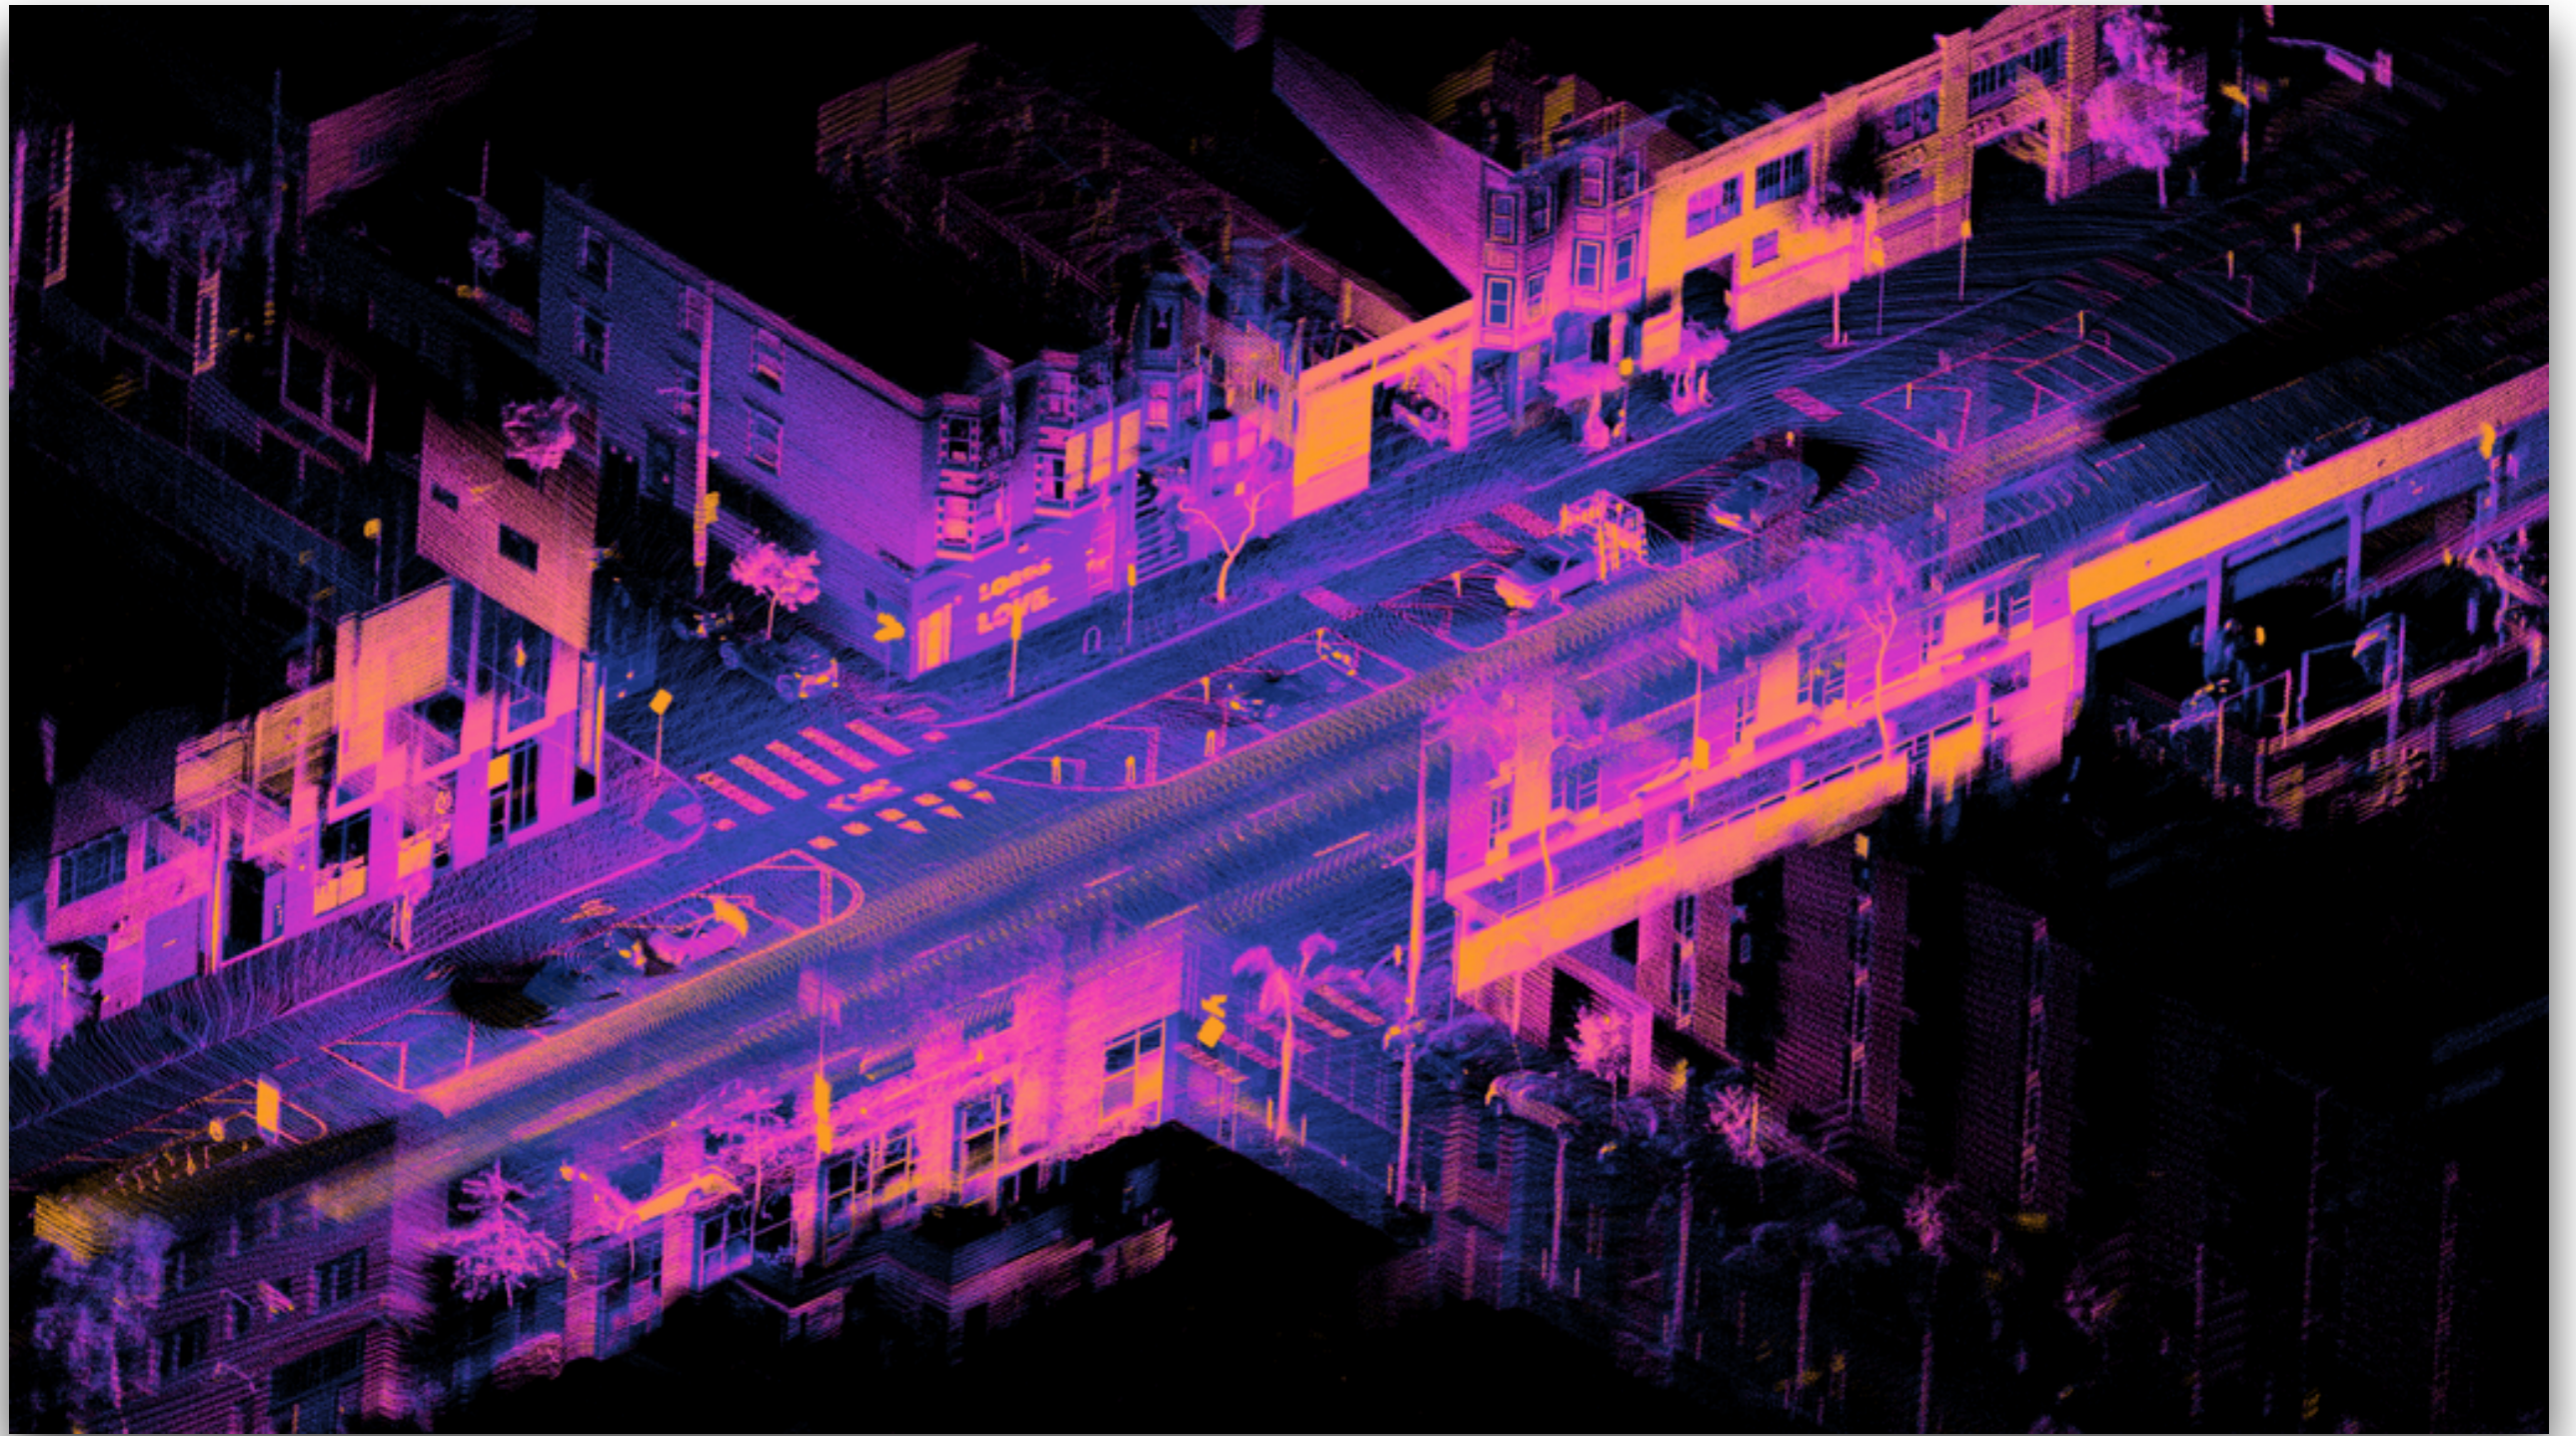

Credit: Wikimedia.

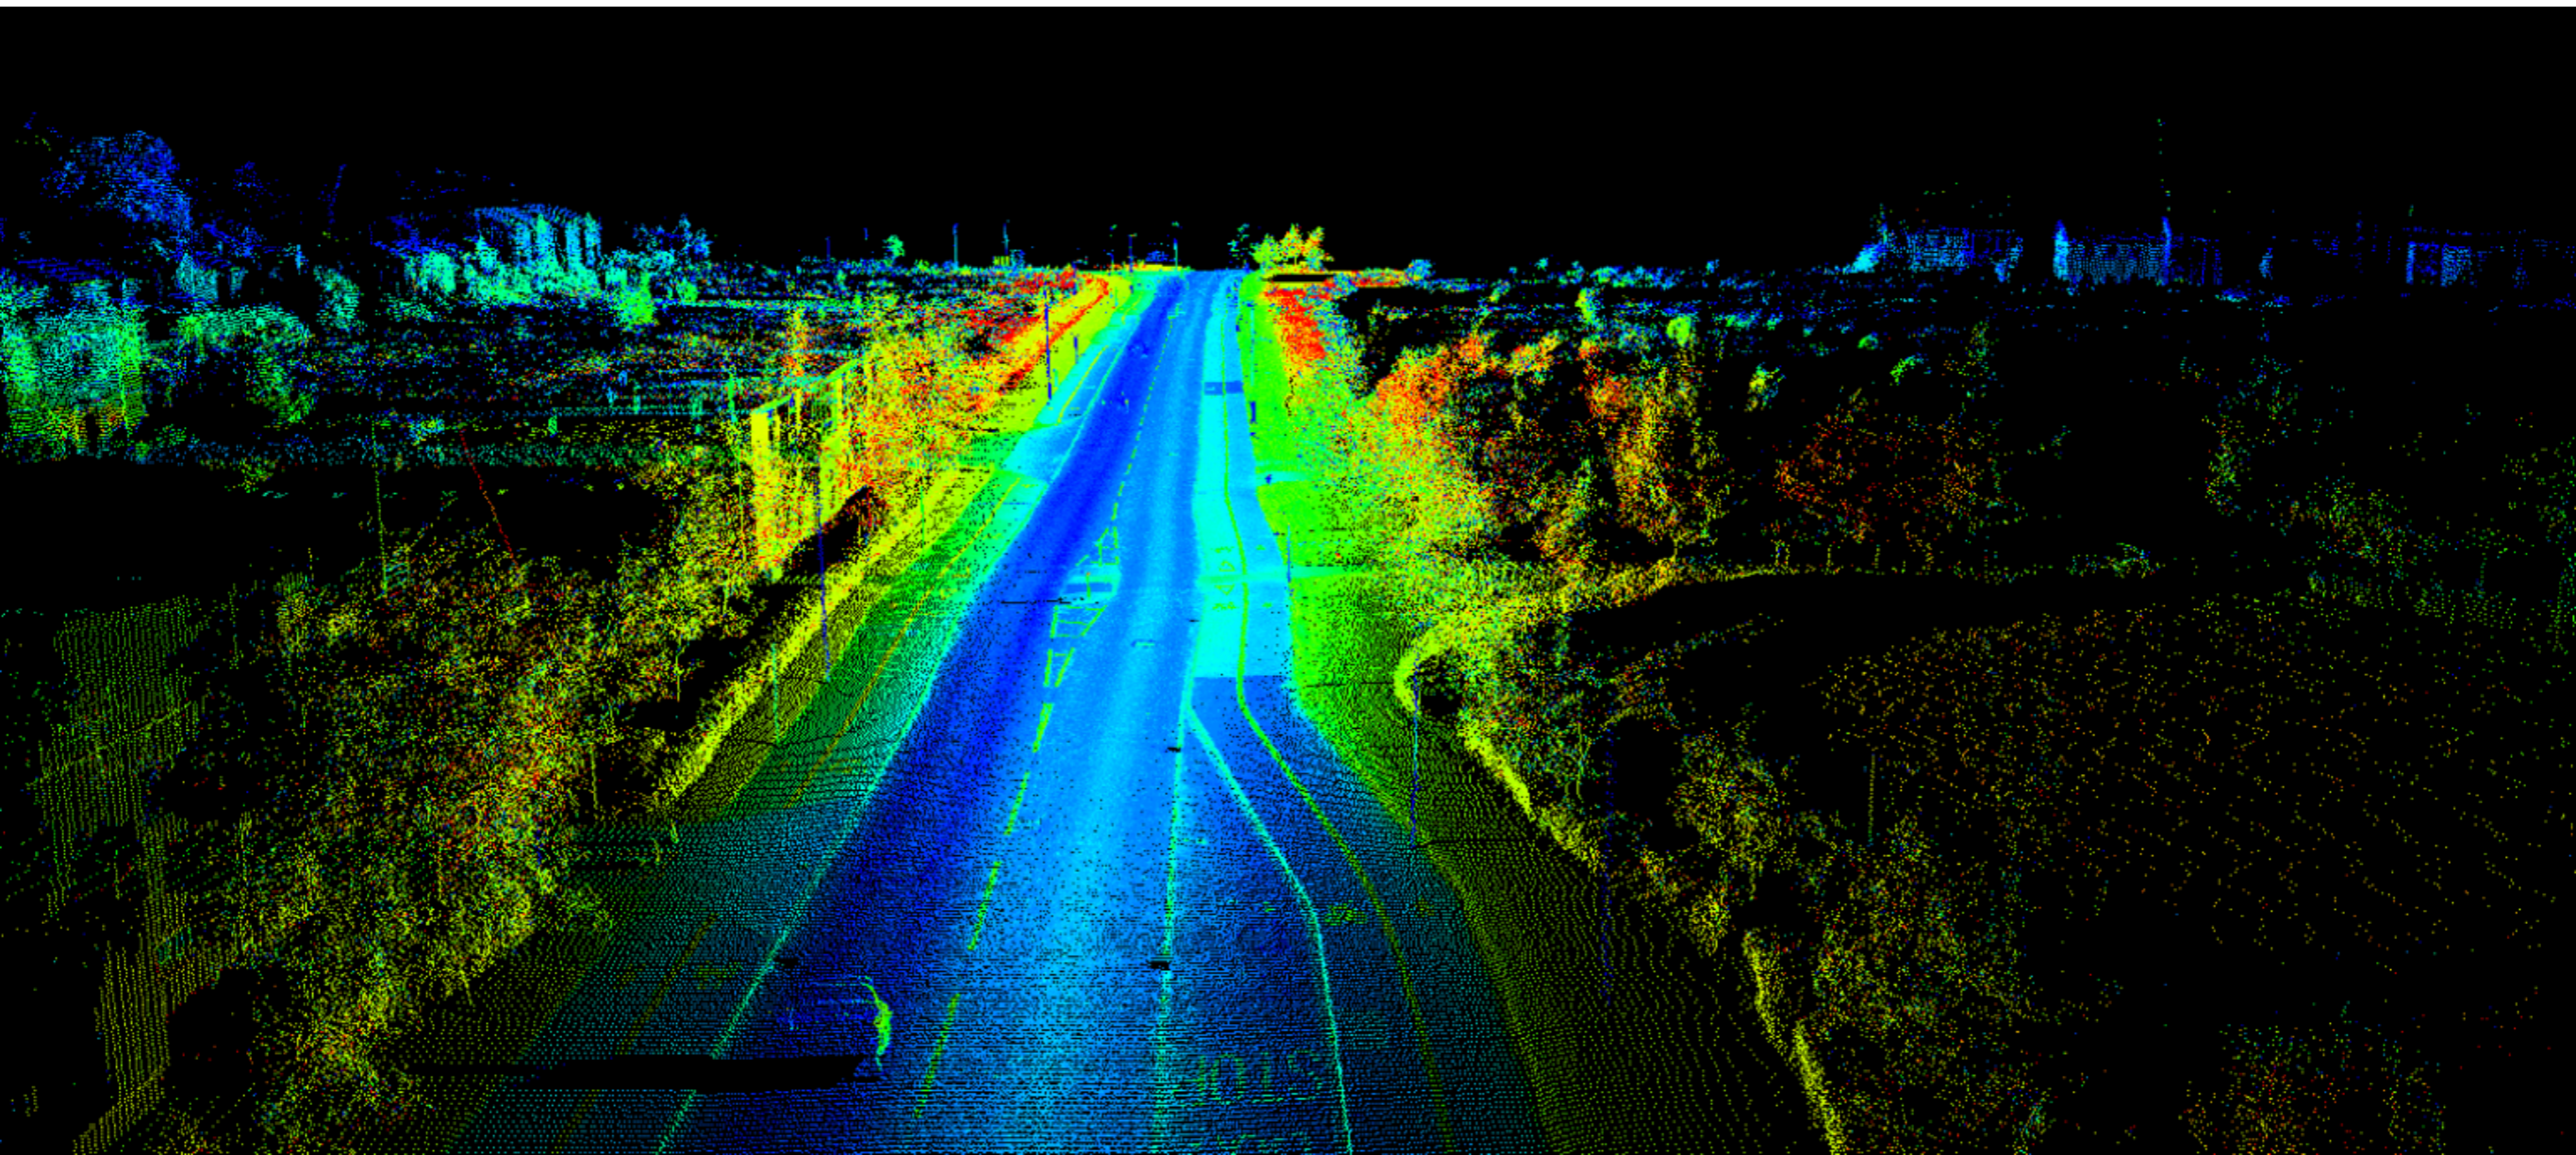

Source: Uber.

# Radar


- ▶ A radar sensor detects the presence of physical objects in the nearby using electromagnetic wave echo.
- ▶ A radar device sensor consists of a transmitter, the unit that sets the electromagnetic waves, and a receiver, the device that processes the “echo”.
- ▶ If the waves do not encounter an object in their path, the waves continues until they are lost in the distance.
- ▶ If they do encounters an obstacle, you get the reflection.
- ▶ Radio waves travel at speed of light.

# Radar

- ▶ A radar sensor can look in a particular narrow direction, so most radar are mounted in arrays that overlap slightly.
- ▶ On a driverless car, a typical configuration will be that three radars will be mounted side by side in a way in order to obtain a 180 degrees coverage.
- ▶ For autonomous driving, the great advantage of radars is that, unlike cameras, they can see through fog, rain, dust, sand, blinding lights, etc.
- ▶ Another advantage of a radar sensor is that it can detect not just the position of an object but also its speed (because of the Doppler effect).

# Radar

- ▶ On a self-driving car, radar detectors complement the visual sensors in figuring out the surrounding environment.
- ▶ By sensing the size, density, speed and direction of nearby objects, the radar collects information that can be compared against the images from digital cameras and the 3-D point cloud from the lidar sensor.
- ▶ Similar to the process used by advanced cameras, a modern radar sensor process raw information in a target list consisting of objects, alongside with their size, location and speed.
- ▶ The radar does not report the presence of the road/tarmac.
- ▶ Static objects are not considered as well.

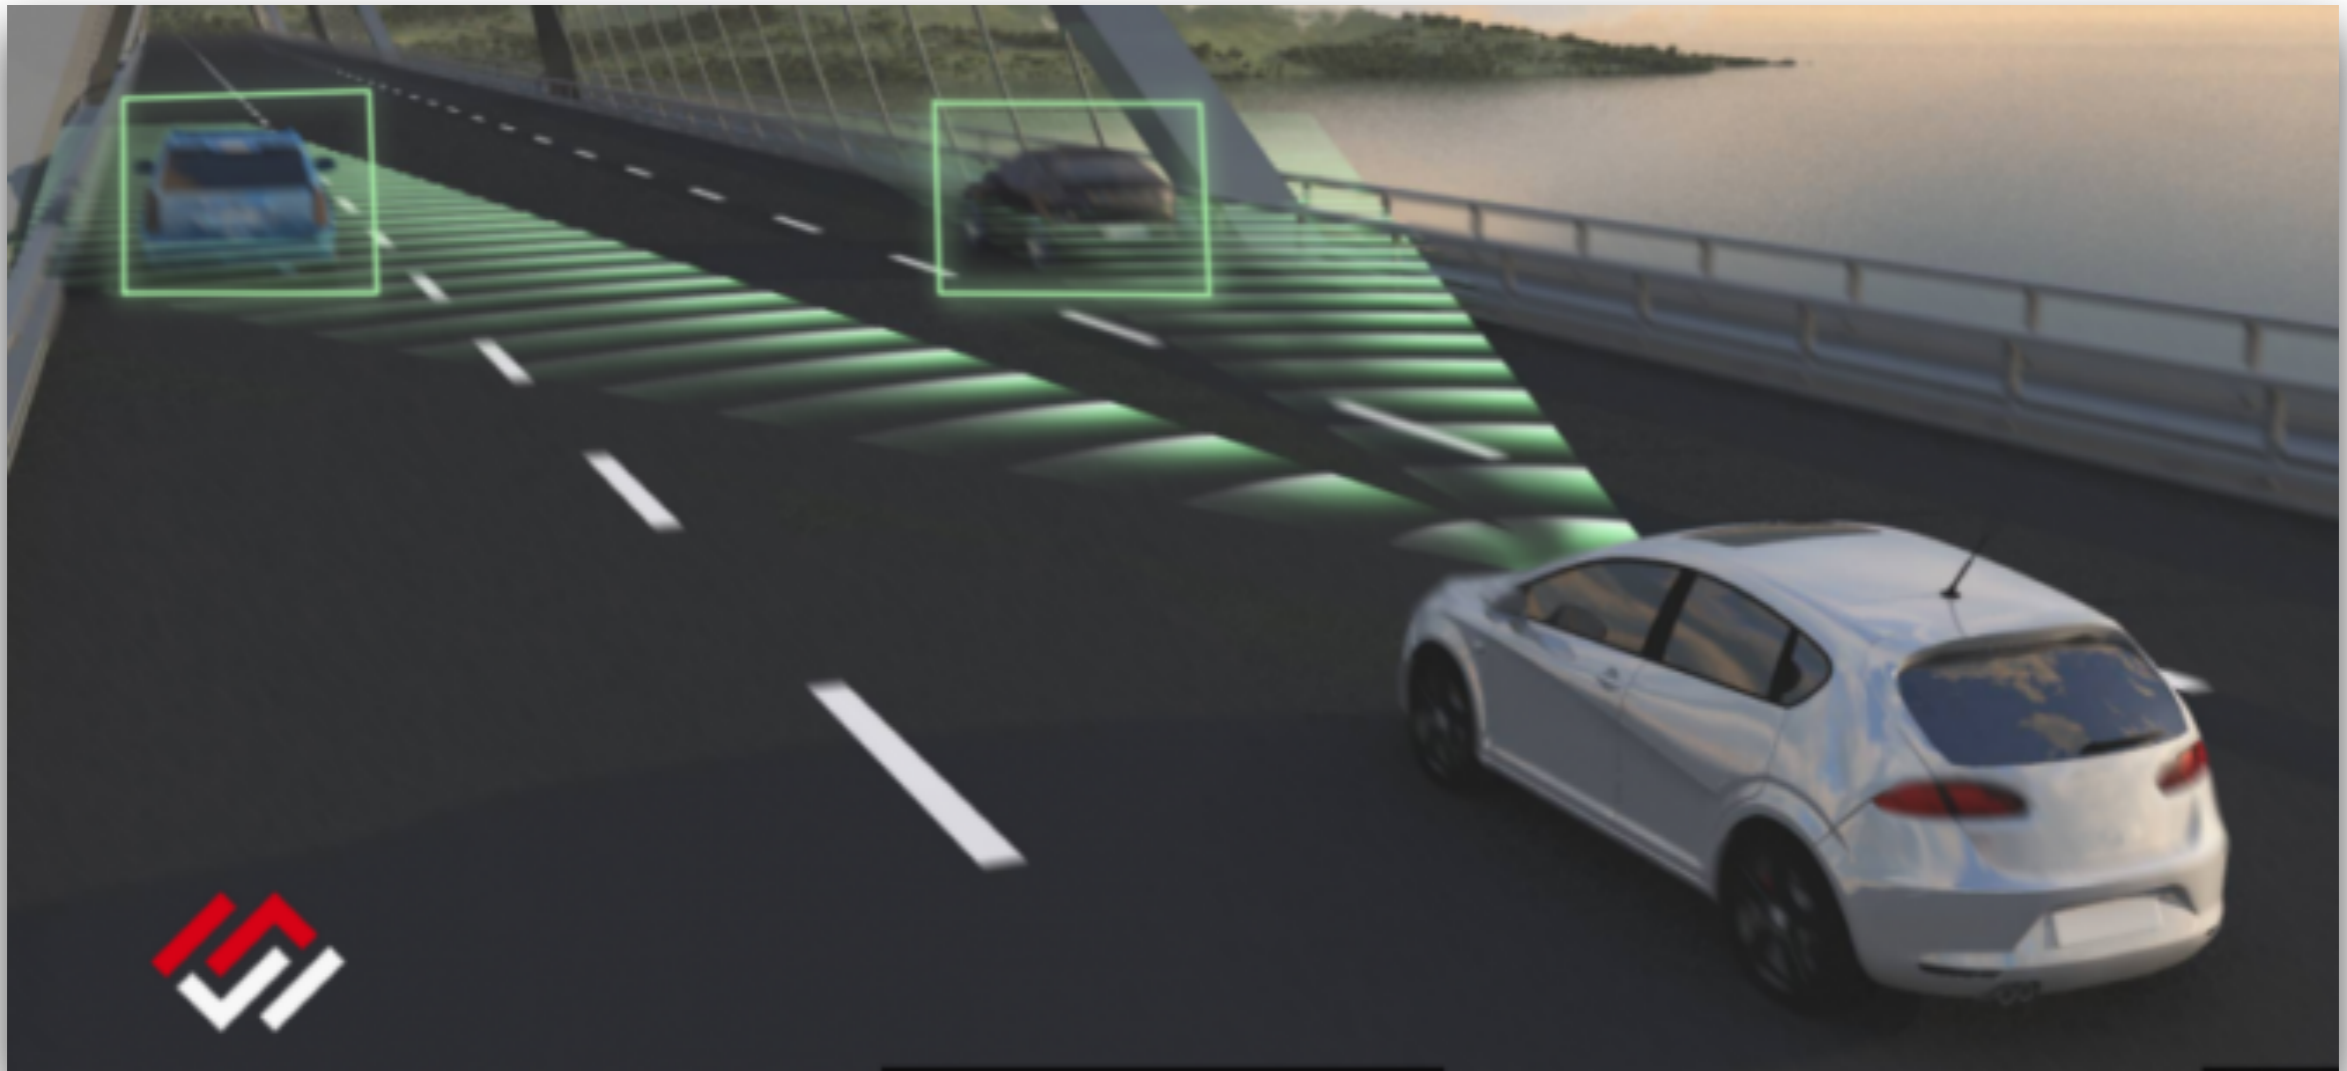

Credit: Nvidia.




# Ultrasonic Sensor (Sonar)

- ▶ A sonar sensor detects the position and speed of objects based not on the time, frequency and speed of waves reflecting off the surfaces.
- ▶ A sonar device is composed of two subunits: an emitter and a receiving sensor. The emitter generates sound waves that have a frequency above 20 kHz and sound beyond the range of human hearing.
- ▶ The receiver listens for the echoes from the emitted sound waves and processes them.

# Ultrasonic Sensor (Sonar)

- ▶ Like radar sensors they can see through fog and dust and they are not blinded by the sun.
- ▶ Since sound waves travel much more slowly than electromagnetic waves, they can detect smaller objects at much higher resolution. But since their energy decays rapidly with distance and wind, sonar can detect object only at a much closer range.
  - ▶ For this reason they are used for parking.



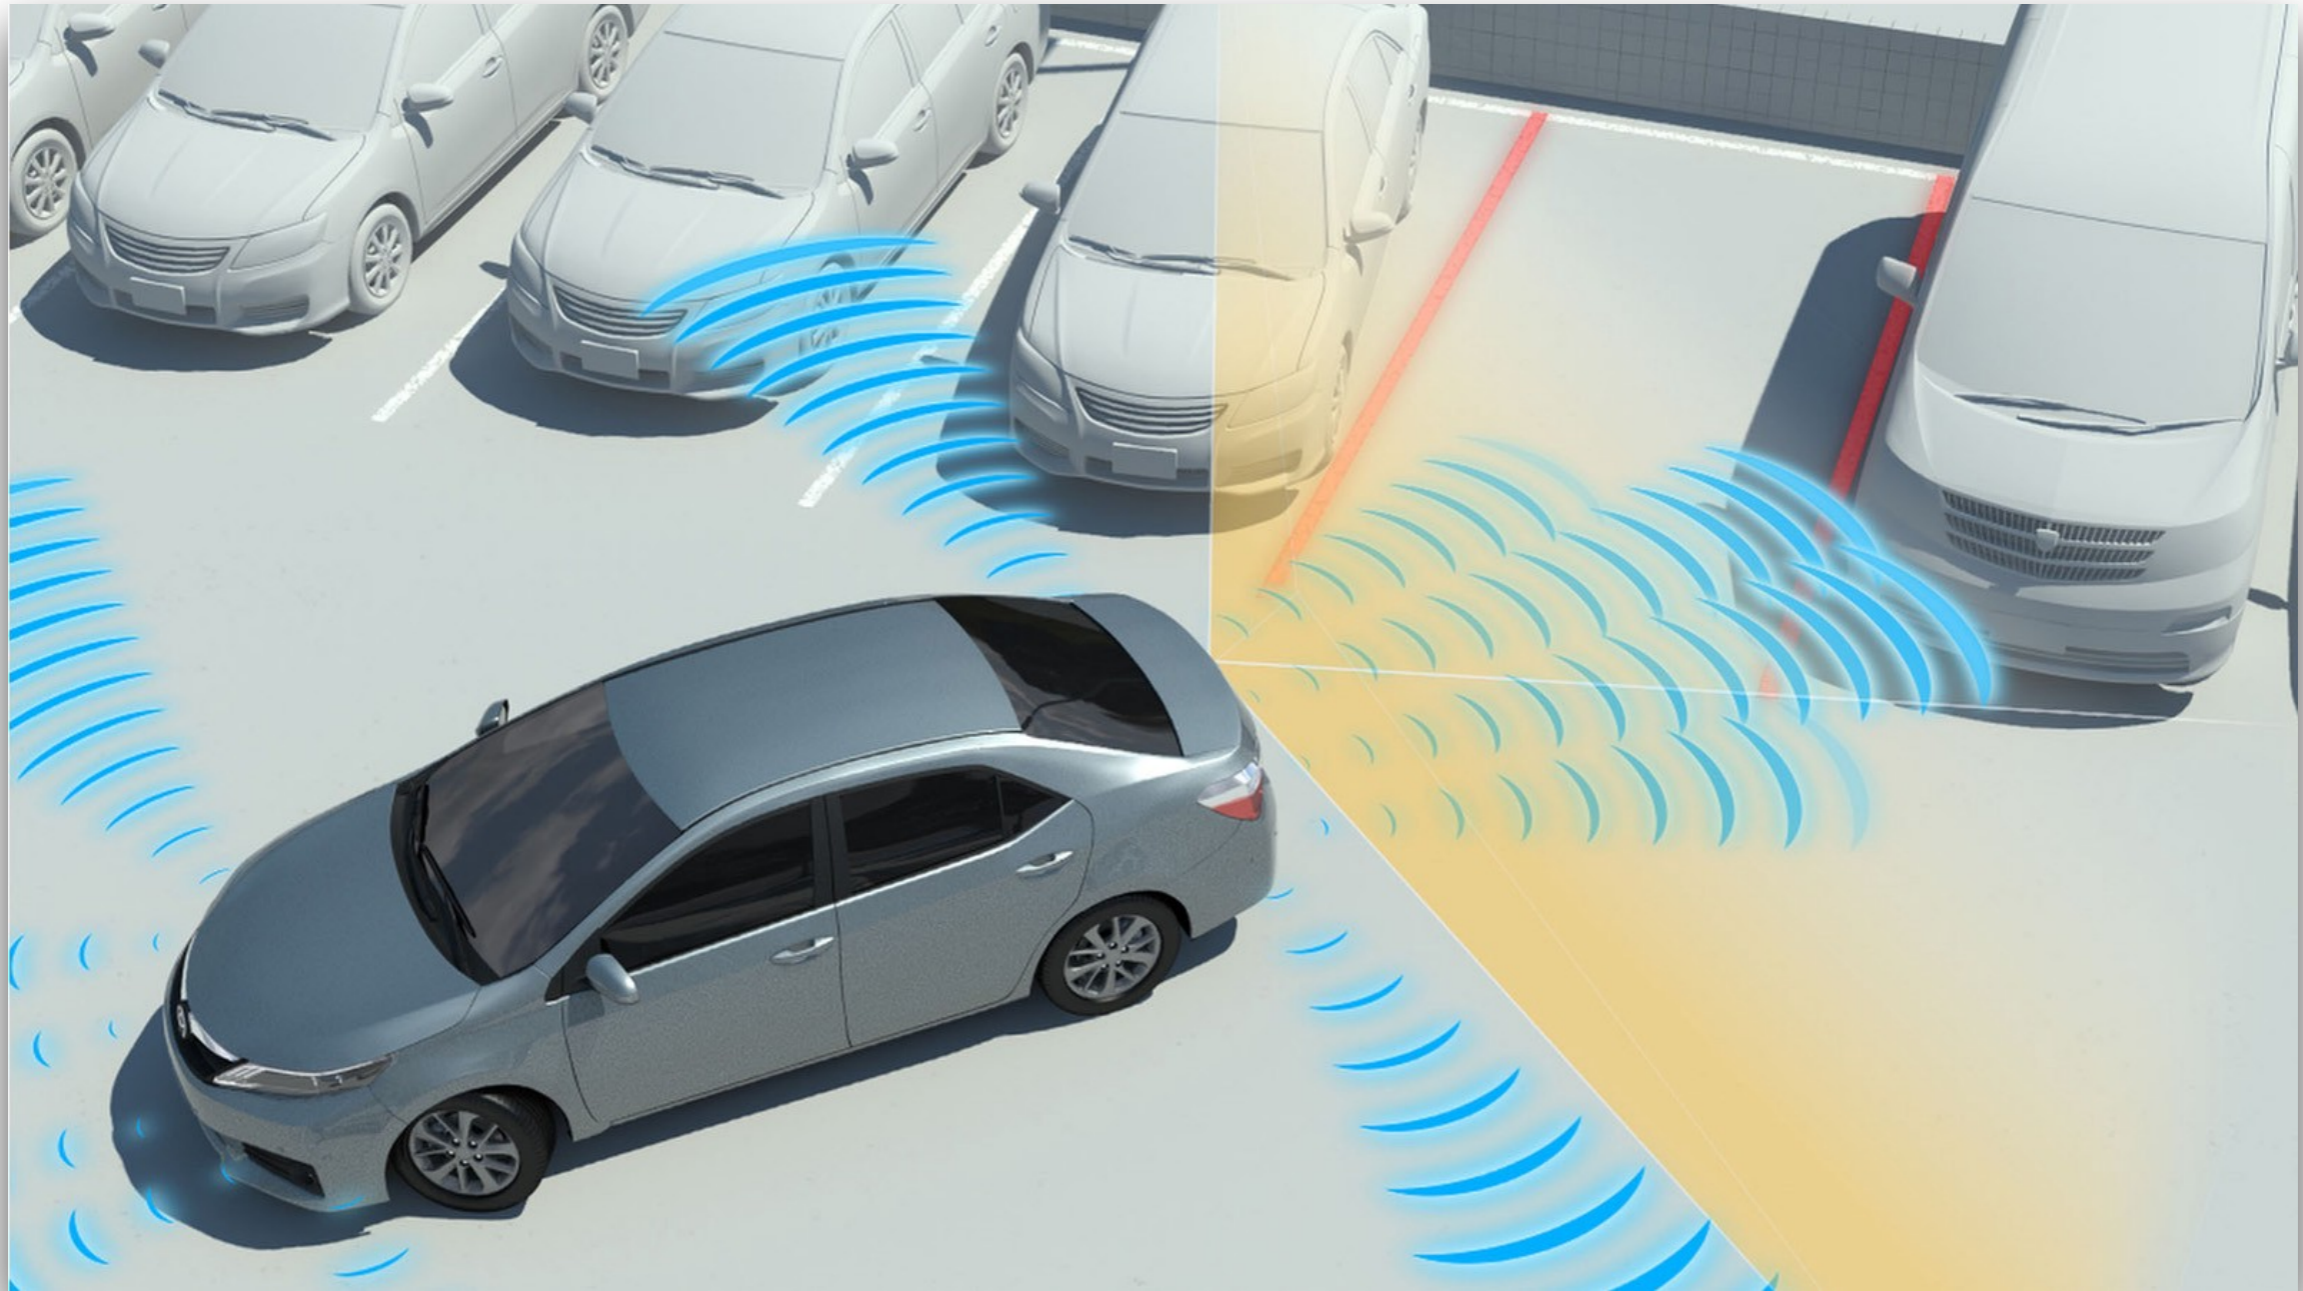











Credit: Bosch.

# Putting everything together


- ▶ All this information is processed in real-time using data fusion and computer vision techniques, recently based on deep learning for image understanding, etc.
- ▶ Different methods are used to reconstruct a scene.
- ▶ One of the most famous algorithms is called SLAM (simultaneous localisation and mapping).
  - ▶ It consists in constructing and updating a map while simultaneously keeping track of the position on it.
  - ▶ Various approximation methods: particle filters, extended Kalman filters, etc.

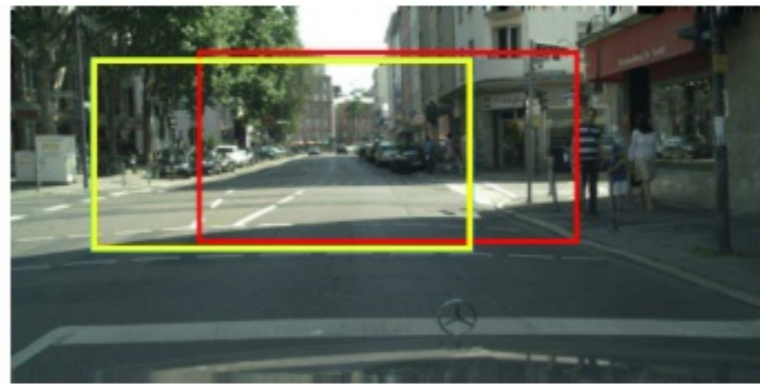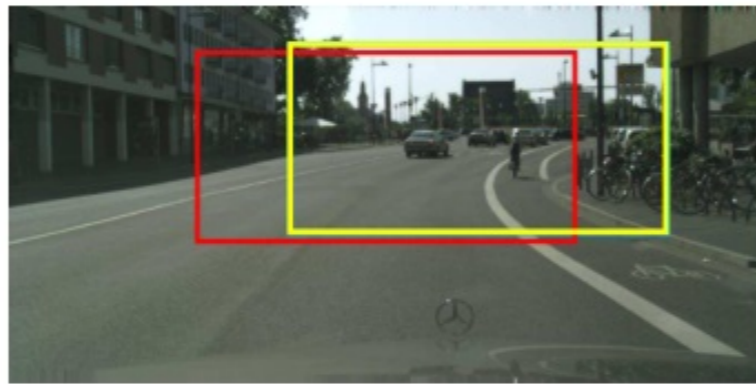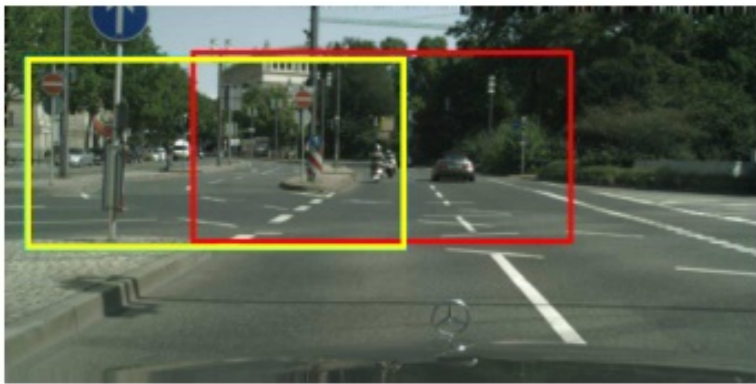

- road
- sidewalk
- building
- wall
- fence
- pole
- traffic light
- traffic sign
- vegetation
- terrain
- sky
- person
- rider
- car
- truck
- bus
- train
- motorcycle
- bicycle

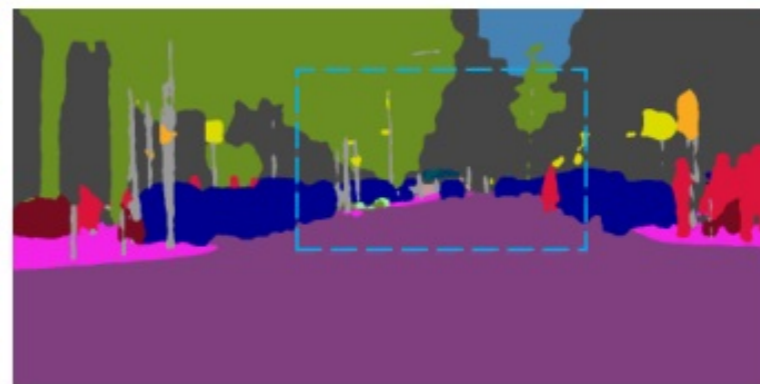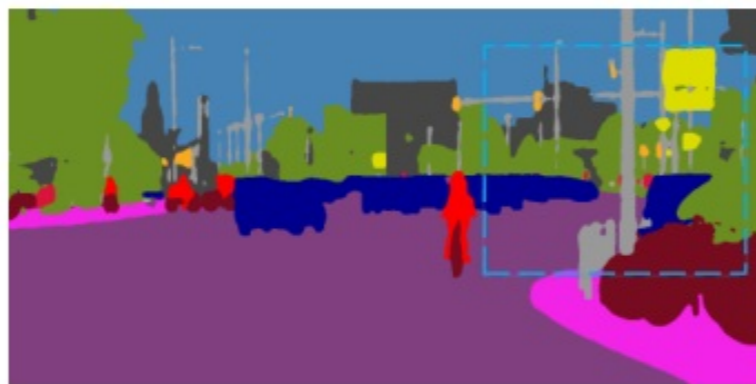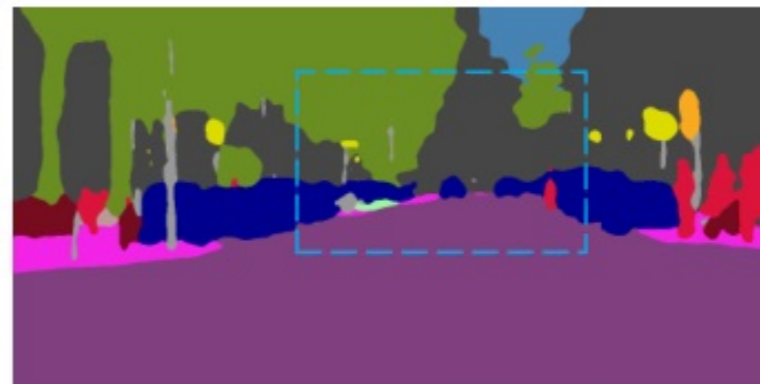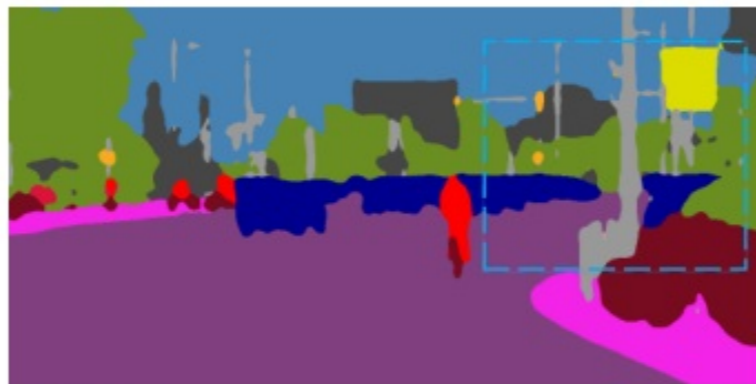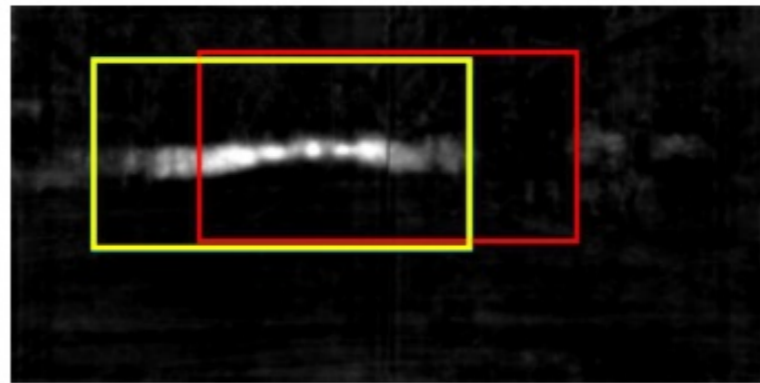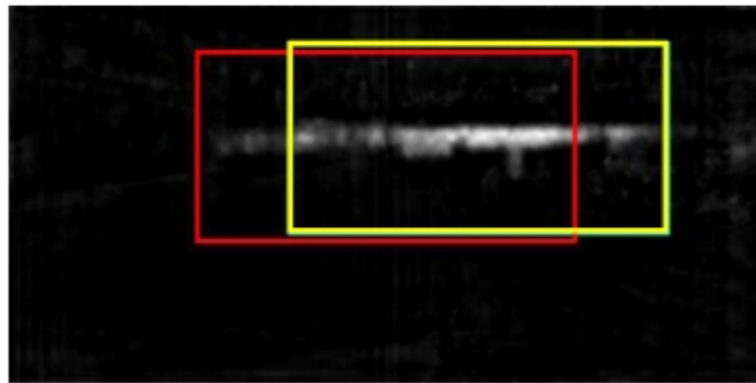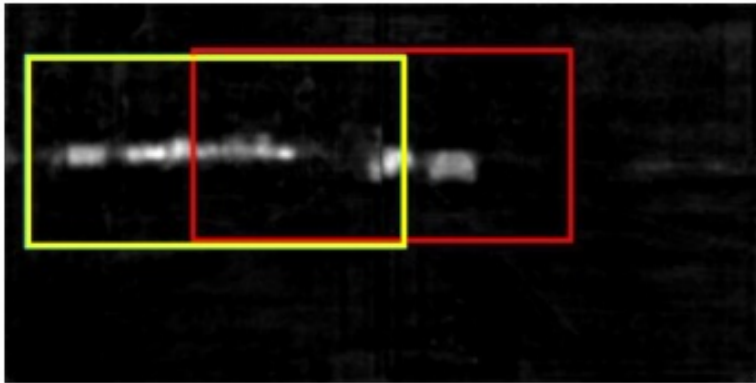

Source: Uber.

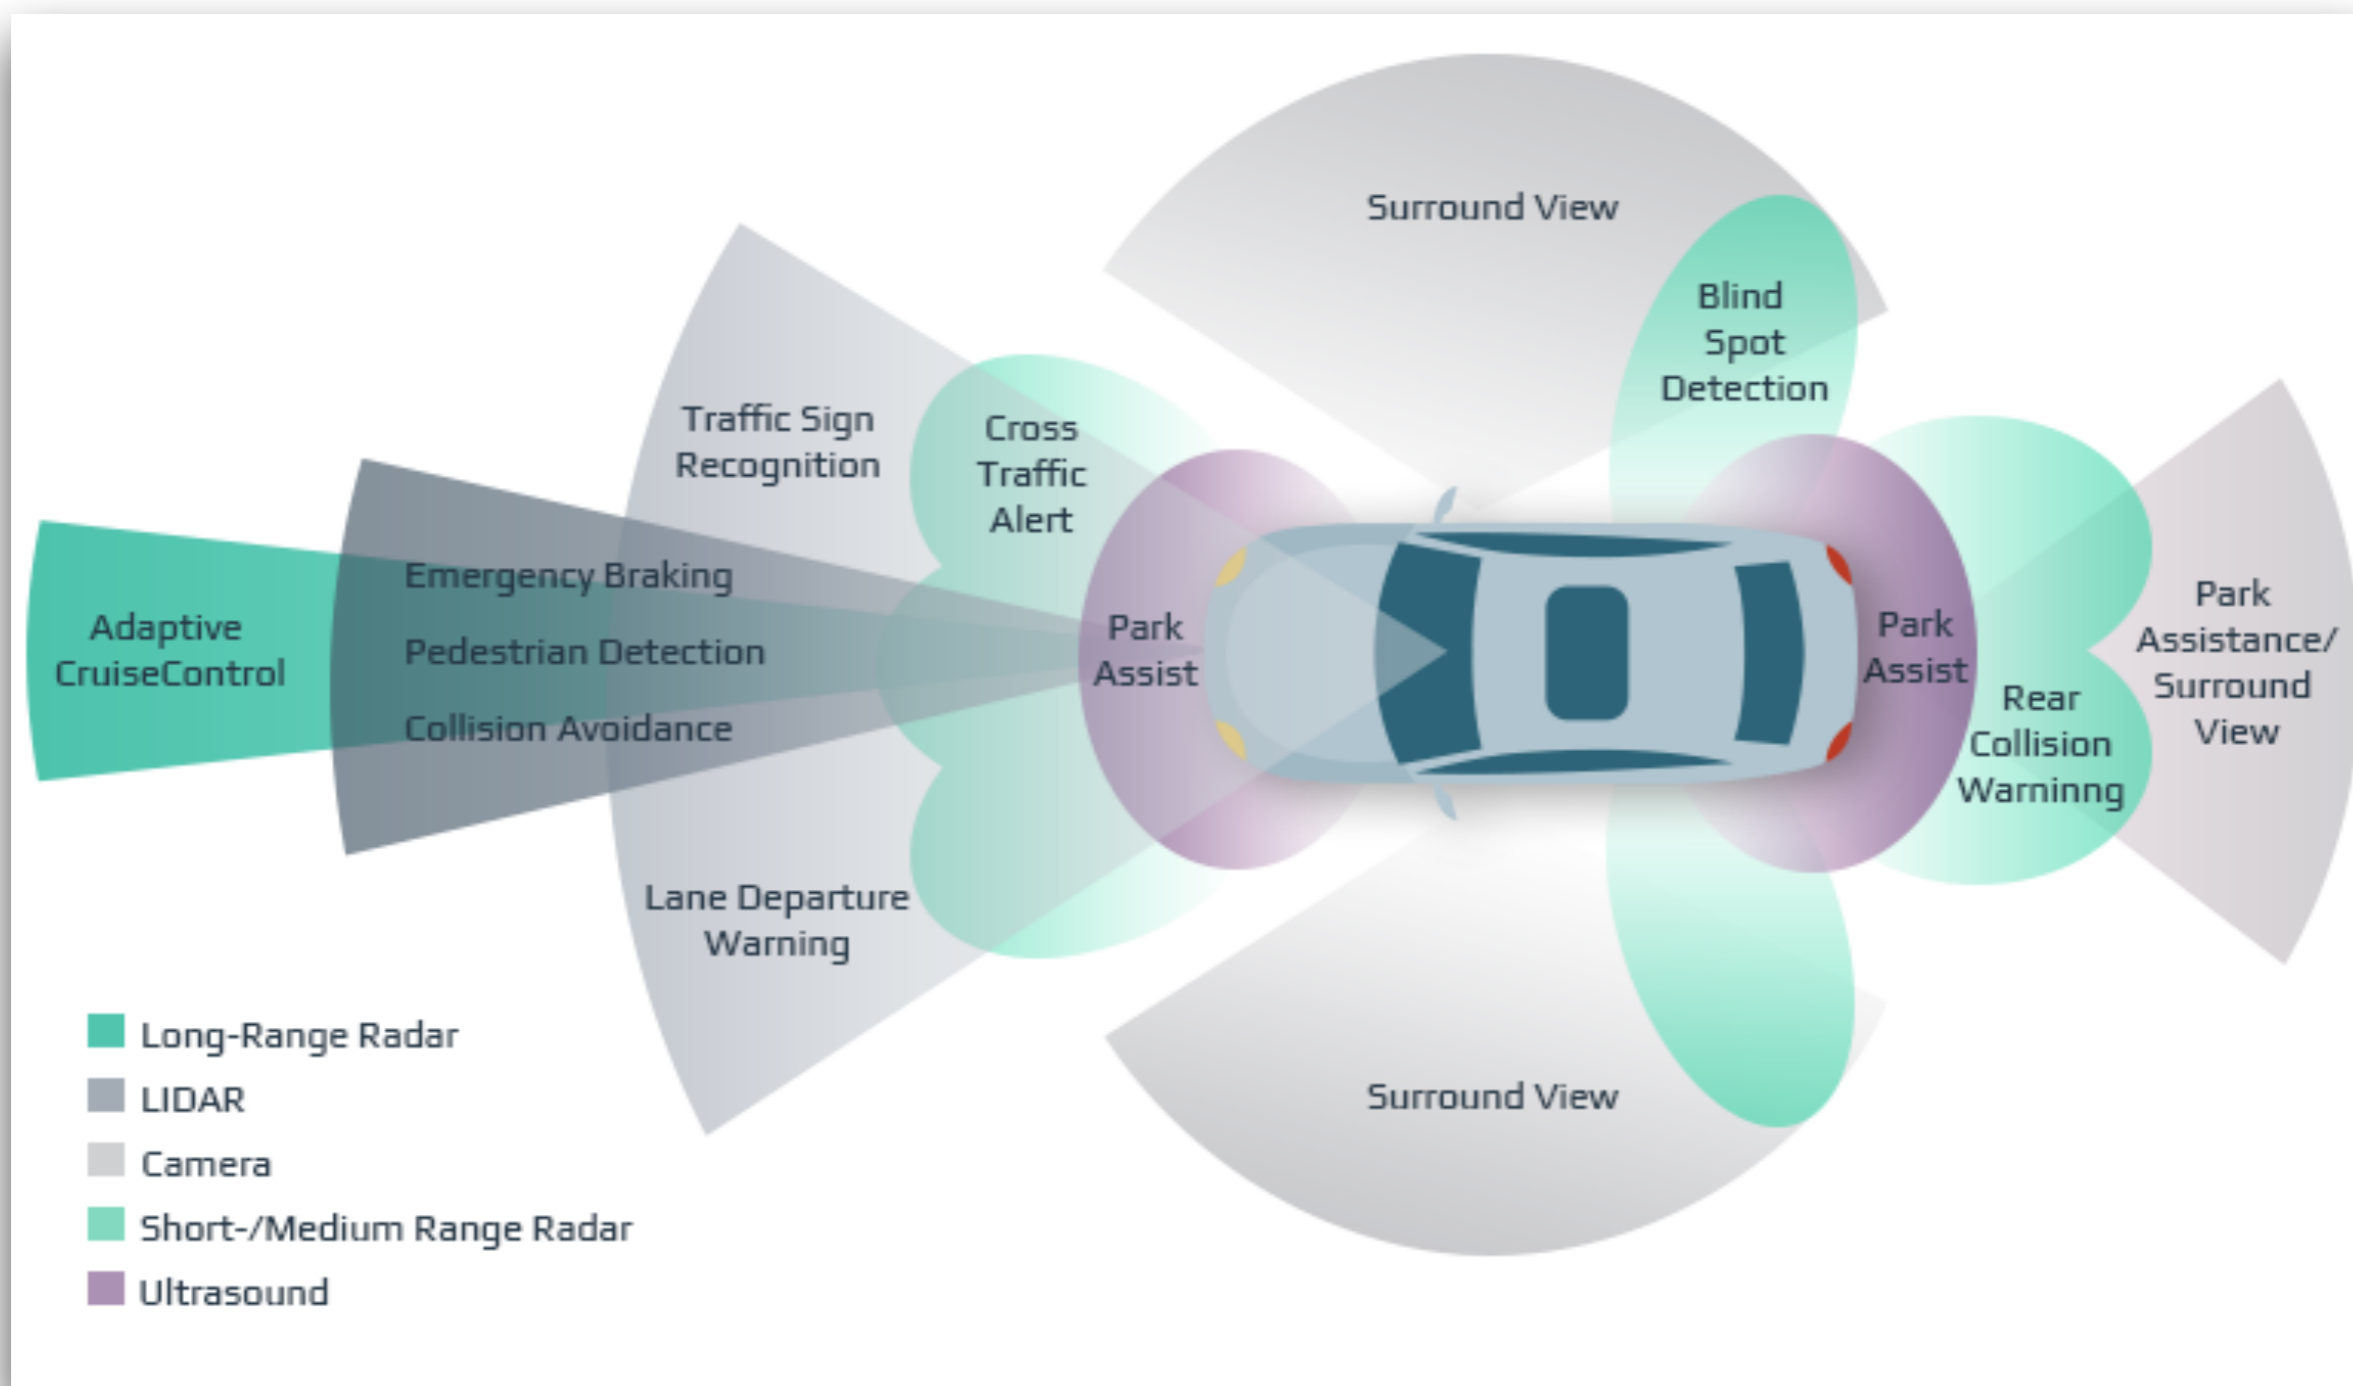

Source: Intellias.

SAE level	Name	Narrative Definition	Execution of Steering and Acceleration/Deceleration	Monitoring of Driving Environment	Fallback Performance of <i>Dynamic Driving Task</i>	System Capability ( <i>Driving Modes</i> )
<b>Human driver monitors the driving environment</b>						
<b>0</b>	<b>No Automation</b>	the full-time performance by the <i>human driver</i> of all aspects of the <i>dynamic driving task</i> , even when enhanced by warning or intervention systems	Human driver	Human driver	Human driver	n/a
<b>1</b>	<b>Driver Assistance</b>	the <i>driving mode</i> -specific execution by a driver assistance system of either steering or acceleration/deceleration using information about the driving environment and with the expectation that the <i>human driver</i> perform all remaining aspects of the <i>dynamic driving task</i>	Human driver and system	Human driver	Human driver	Some driving modes
<b>2</b>	<b>Partial Automation</b>	the <i>driving mode</i> -specific execution by one or more driver assistance systems of both steering and acceleration/deceleration using information about the driving environment and with the expectation that the <i>human driver</i> perform all remaining aspects of the <i>dynamic driving task</i>	<b>System</b>	Human driver	Human driver	Some driving modes
<b>Automated driving system ("system") monitors the driving environment</b>						
<b>3</b>	<b>Conditional Automation</b>	the <i>driving mode</i> -specific performance by an <i>automated driving system</i> of all aspects of the dynamic driving task with the expectation that the <i>human driver</i> will respond appropriately to a <i>request to intervene</i>	System	<b>System</b>	Human driver	Some driving modes
<b>4</b>	<b>High Automation</b>	the <i>driving mode</i> -specific performance by an automated driving system of all aspects of the <i>dynamic driving task</i> , even if a <i>human driver</i> does not respond appropriately to a <i>request to intervene</i>	System	System	<b>System</b>	Some driving modes
<b>5</b>	<b>Full Automation</b>	the full-time performance by an <i>automated driving system</i> of all aspects of the <i>dynamic driving task</i> under all roadway and environmental conditions that can be managed by a <i>human driver</i>	System	System	System	<b>All driving modes</b>

Source: SAE International.



# References

- ▶ Robin R. Murphy. Introduction to AI Robotics. Second Edition. MIT Press. 2019.
- ▶ Hod Lipson and Melba Kurman. Driverless. Intelligent Cars and the Road Ahead. MIT Press. 2017.